

ZOK/GAD/2025-26/316

Date: 16.12.2026



UCO Bank
Zonal Office
75/4 Siddhi Sadan
Halsey Road, Kanpur – 208001
Phone-8869935001, 8789356663
Email - zokanpur.gad@uco.bank.in

RFP for Furnishing & Electrical works at Bank's Bangarmau Branch situated at Lucknow Kanpur Road Bangarmau PIN – 209859 Uttar Pradesh.

Part – I (Technical Bid)

The information provided by the bidders in response to this RFP Document will become the property of the Bank and will not be returned. The Bank reserves the right to amend, rescind or reissue this RFP Document and all amendments will be advised to the bidders and such amendments will be binding on them. The Bank also reserves its right to accept or reject any or all the responses to this RFP Document without assigning any reason whatsoever. This document is prepared by UCO Bank for Interior Furnishing, electrical and Air Conditioning works at Bank's Bangarmau Branch situated at First Floor Mishra Market, Hardoi Unnao Road, Bangarmau, District- Unnao, PIN- 209868 Uttar Pradesh. It should not be reused or copied or used either partially or fully in any form.

INDEX

Sl.No.	Particulars	Page No.
1	Notice Inviting Tender	1-3
2	Eligibility Criteria & Evaluation Criteria	4
3	REJECTION OF BID	4
5	ANNEXURE-I(DECLARATION)	5

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@uco.bank.in, zokanpur.gad@uco.bank.in Contact

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucoBank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official





6	ANNEXURE-II (TECHNICAL SPECIFICATION)	6
7	FINANCIAL BID-BOQ	7-47

Disclaimer


While the document has been prepared in good faith, no representation or warranty, express or implied, is or will be made, and no responsibility or liability will be accepted by UCO BANK or any of its employees, in relation to the accuracy or completeness of this document and any liability thereof expressly disclaimed. The RFP is not an offer by UCO BANK, but an invitation for bidder's responses. No contractual obligation on behalf of UCO BANK, whatsoever, shall arise from the offer process unless and until a formal contract is signed and executed by duly authorized officials of UCO BANK and the selected Bidder.

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@uco.bank.in, zokanpur.gad@uco.bank.in Contact:



Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust




Notice Inviting Tender

UCO Bank invites sealed tender offers (technical and financial offer) from our empanelled contractors for Furnishing and Electrical works at Bank's Bangarmau Branch situated at **First Floor Mishra Market, Hardoi Unnao Road, Bangarmau, District- Unnao, PIN- 209868** Uttar Pradesh.

A) The bidder (also called the vendor or bidder through this document) selected through this bidding process shall own the single point responsibility for fulfilling all obligations and providing all deliverables and services required for successful implementation of the project.

B) Salient Features

Tender Reference	ZOK/GAD/2025-26/316 dated 16.02.2026
Name of the work	Furnishing, Electrical & AC works at Bank's Bangarmau Branch situated at First Floor Mishra Market, Hardoi Unnao Road, Bangarmau, District- Unnao, PIN- 209868 , Uttar Pradesh.
EMD	EMD: a) EMD of 1) Rs. 5,000/- for furnishing work 2) Rs. 7,000/- for electrical & AC works. DD must be submitted with Technical Bid (Part-I) in the form of pay order /demand draft in favour of UCO Bank, payable at Kanpur. Not Applicable for MSME (Document related MSME to be furnished Under Part-I). b) EMD of unsuccessful bidders will be released (without any interest). c) EMD of L-1 bidders will be released (without any interest) after submission of Performance Bank Guarantee. d) However, if Successful tenderer withdraws their acceptance before completion of Work, UCO Bank will have the right to forfeit the Earnest Money Deposit without making reference.
Last date and time for submission of tender	Off line original hard copy of Part-I and Part-II of tender document to be submitted by 23.02.2026







	to 05.03.2026 upto 16:00 hrs at UCO Bank, GAD, Kanpur Zonal Office, 75/4 Siddhi Sadan, Halsey Road, Kanpur -208001
Date of opening of tender	Technical and financial bids to be opened on 06.02.2026 at 11:00 hrs.
Time for completion	30 Days from issue of work order
Address of communication	UCO Bank, Kanpur Zonal Office General Administration Department 75/4, Siddhi Sadan, Halsey Road, Kanpur-208001
Email	zokanpur.gad@uco.bank.in
Phone No.	8869935001, 8789356663
Architect for technical clarifications and drawings	M/s Gunjan & Associates Contact - 9838818489
Mode of submission	Offline hard copy
Contents of technical bid (Part-1)	a. Original Demand Draft of EMD (Not Applicable for MSME (Document related MSME to be furnished)). b. Bidder's Covering letter (Annexure 1) Empanelment Letter suitable for the said category Issued by any of our Zonal office.
Validity of tender	90 (Ninety) days from date of opening

C) Submission of tender

The envelope containing Part-I of tender should be super scribed clearly "Part-I (Technical Bid)" with the name of work and will be addressed to 'The Zonal Manager, UCO Bank Kanpur Zonal Office' and must be submitted on or before the stipulated date & time of submission of tender. The financial bid should be submitted in one big non window-envelope in the same envelope containing envelope of Technical Bid. The sealed envelope should be super-scribed as "Furnishing, Electrical & AC works at Bank's Bangarmau Branch situated at First Floor Mishra Market, Hardoi Unnao Road, Bangarmau, District- Unnao, PIN- 209868, Uttar Pradesh."

1. The documents should be submitted to UCO Bank, Kanpur Zonal Office General Administration Department, 75/4, Siddhi Sadan, Halsey Road, Kanpur-208001 within stipulated time frame.





युको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust




D) Miscellaneous items

1. Vendor's representatives will be allowed to be present during opening of bids at their cost.
2. In case date of pre-bid meeting, last date of receipt or opening of tender are declared as holiday, the respective date shall be treated as deferred and will be re-scheduled to next working day correspondingly.
3. It may be noted that the requirement given in this RFP is indicative only.
4. Tenders/offers through email will not be accepted.
5. Bank reserves the authority to accept or cancel any or all tenders without assigning any reason.
6. All tenders in which any of the prescribed conditions are not fulfilled or are incomplete in any respect or there is any correction in Price Bid is not duly signed and dated by the bidder are liable to be rejected.
7. In the event that the L-1 vendor fails to meet the eligibility criteria or is unable to complete/execute the assigned work, the Bank reserves the right to award the tender to the L-2 or L-3 vendor, provided they agree to execute the work at the same rates quoted by the L-1 vendor.


Zonal Head
Kanpur Zonal Office





Eligibility Criteria

1. The contractor must be empaneled contractor of UCO Bank.
2. The contractor must apply only in that trade (furnishing, electrical & air conditioning works) in which he has been empaneled in the Bank.


Evaluation Criteria


Lowest Bid Value will be evaluated on lowest price offered by the bidder against Financial Bid.

Rejection of Bids

The bid is liable to be rejected summarily if:

- i) Tenders are not received in two parts in separate envelopes.
- ii) It is not in conformity with the instruction mentioned in this tender document.
- iii) If it is not accompanied by requisite tender cost and EMD as stated above.
- iv) It is received after expiry of the due date and /or time.
- v) It is evasive and contains incorrect information.
- vi) If there is canvassing of any kind.
- vii) It is submitted anywhere other than the tender box or to the addressee.
- viii) If any indication of price/rate/charges is being found in Part-I of the tender.
- ix) If the bidder has applied in that trade in which he/she is not empaneled.






यूको बैंक
सम्मान आपके विश्वास का



UCO BANK
Honours Your Trust



ANNEXURE - I

To
Zonal Head
UCO Bank Zonal Office
Kanpur

Sir

1. We have carefully examined all the contents incorporated in the various parts of this Tender Document no dated and taken note of all the terms & conditions stated in the Tender Document in its various parts.
2. We hereby agree to abide by and fulfil all other Terms and Conditions of the Tender.
3. We also agree to keep the retention money clause as mentioned in the tender document.
4. The integrity and letter of undertaking and indemnity submitted by us during empanelment in Bank's list of empaneled contractors shall be binding on me during the course of this work.

For and on behalf of


(With seal)


Signature _____

Name _____

Designation _____

DULY AUTHORIZED SIGNATORY





_____ day of _____ 2025


ANNEXURE-II
TECHNICAL SPECIFICATIONS
Approved Make

APPROVED MAKE OF MATERIALS		
1.	False Ceiling/Channels	India Gypsum/Armstrong/AMF/Saint Gobain
2.	Aluminium Framework/Aluminium Section	Jindal/Tata
3.	Wood Skirting/Moulding/Lipping/Beading	C P Teak
4.	Wood Preservative	ST P Pentaphene Pale / Termiseal by PCI / Bison by British Paint
5.	Fire Retardant Paint	Industrial grades of Nobel/Viper
6.	Marine Ply with ISI:710 Mark	10 BWR Green/Century/Archid (Sub-brand is not accepted)
7.	BWP Block Board (IS:1659)	IS:710 BWR Green/Century/Archid (Sub-brand is not accepted)
8.	Laminate (1 mm thick)	Merino Lam / Green lam / Century mica / Sun mica
9.	Door Closure (Heavy Duty)	Ebco / Ozone / Dorma / Godrej
10.	Door Lock	Godrej/Ebco
11.	Door Handles	Godrej / Hafele /Hettich / Ebco
12.	Drawer/Storage Handle	Godrej / Hafele /Hettich / Ebco
13.	Drawer/Storage lock (Multipurpose)	Godrej / Hafele /Hettich / Ebco
14.	Night latch	Godrej
15.	Screws	GKF/Nettle Fold
16.	Hinges	CIEF
17.	Sliding telescopic drawer channel	Ebco / Kombo / Earl Behari / Efficient Gadjets
18.	Cable Organiser	Ebco/Innofitt Systems (CM 63C)
19.	Adhesive	Fevicol SH / Araldite
20.	Soft Board	Jolly Board
21.	Vertical/Roller Blinds	Mac / Vista / Wincab
22.	Glass	Modiguard /AIS / Saint Gobain
23.	Paints (Synthetic Enamel / Acrylic Emulsion)	Asian Paints / Berger / Dulux
24.	PVC Flooring	Krishna Vinyl / Armstrong / Birla
25.	Texture Paint	Asian Paints / Berger / Dulux
26.	G I Pipe	TATA (Medium)/Jindal Steel
27.	Cement	Ultratech/Ambuja/ACC
28.	Vitrified tiles	Johnson/Kajaria/Niteco/ASL





यूको बैंक
सम्मान आपके विश्वास का



UCO BANK
Honours Your Trust



29.	Ceramic Tiles	Johnson/Kajaria/Nitco/ASL
30.	ACP	Alucobond/Alstone/Eurobond
31.	Veneer (4mm)	Century/Ply
32.	All materials not covered above	As per sample approved by Bank/Architect



UCO Bank
Zonal Office
75/4 Siddhi Sadan
Halsey Road, Kanpur – 208001
Phone-8869935001, 8789356663
Email - zokanpur.gad@uco.bank.in

RFP for Furnishing & Electrical works at Bank's Bangarmau Branch situated at First Floor Mishra Market, Hardoi Unnao Road, Bangarmau, District- Unnao, PIN- 209868 Uttar Pradesh.


Part – II (Financial Bid)

The information provided by the bidders in response to this RFP Document will become the property of the Bank and will not be returned. The Bank reserves the right to amend, rescind or reissue this RFP Document and all amendments will be advised to the bidders and such amendments will be binding on them. The Bank also reserves its right to accept or reject any or all the responses to this RFP Document without assigning any reason whatsoever.


This document is prepared by UCO Bank for Interior Furnishing, electrical & AC works at Bank's Bangarmau Branch situated at First Floor Mishra Market, Hardoi Unnao Road, Bangarmau, District- Unnao, PIN- 209868 Uttar Pradesh.

It should not be reused or copied or used either partially or fully in any form.





यूको बैंक
सम्मान आपके विश्वास का



UCO BANK
Honours Your Trust



BILL OF QUANTITY FOR FURNISHING WORKS

UCO BANK AT BRANCH BANGARMAU

ZONAL OFFICE KANPUR

1.No offsite prefabrication shall be allowed in any case. All fabrication shall be done at the site after getting the materials inspected by the architect

2.No payment shall be made for any in completed or unsatisfactory work

3.The Contractor should strictly follow the Booklet requirements of the Bank

including the detailed drawings in the booklet. Any discrepancy between the booklet and the Specifications below should be brought to the notice of the Architect.

4.List of material to be strictly as per the booklet.

5.Cable Managers to be provided in the tables and Counters wherever required.

6.All underframe should be properly treated with antitermite and waterproofing material

7.All Locks in the drawers and doorsetc. should be of Godrej


8.All keyboard Trays and Drawers to be on Channel Sliding Mechanism.


9.Etching to be provided as per Banks Design and Specification.

10. The contractor to follow the banks colour Coding. Any other specified colour to be superceded by the Banks Colour code.


11. All board to be BWP. Of approved brand and if written BWR it should be superceded by BWP board/ply.

S.N o.	Item	Units	Qty.	Rate	Amount
	In case of full height partitions measurement of height shall be taken from the finished floor level upto the level of the false either side of the partition ceiling, in case of varying heights on average height shall be considered.				






यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust



	The rate to include provision of extra framework as necessary for skirting & making provision for laying conduit as/drng & directions of site engr./ architect. All underframing to be treated with antitermite solution chlorpyriphos based in recommended dilution.				
1	Full Height partly glazed/unglazed Partitions (Including Doors)	Sq. ft.	699.00		
	Glazed Partition(upto false ceiling height only considered and above necessary ceiling supports to be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75" section, spacing of 2'0"x2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of banks colours for skirting & borders on both sides and approved colour laminate for base colour on both sides. Above 1'0"/2'6"/3'0" height partition, fixed with 8 mm bevelled glass with sticker works door and teak wood beading with melamine polish. Clear glass shall be finished with frosted film sticking over the glass of approved pattern and design. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc.Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc.Complete as per drawings and instructions of the Architect.				
	The job shall also include for provision of laying conduits, switch boxes etc. The erection of partition shall include for expansion bolts cleats, clamps bolts, nuts, screws, rivets and other accessories, all complete up to the satisfaction of the Architect.				
	The partition and doors shall have hinges floor springs/sliding arrangement/ hydraulic door closer, mortise locks with handle set (Godrej, Dorma make all), etc. The rate shall include cost of all materials, labour, T&P, wastages, etc. required for proper completion of work, all complete to the satisfaction of the Architect.				






युको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust




	Full height Solid partition (height 8'-6" or ceiling height) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75" sections, spacing of 2'0"x2'0" on both sides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colour for skirting & borders and laminates for base on both sides with all necessary fixing accessories, arrangements and etc. Partition shall have necessary opening of approved size as per standards for fixing machine's and additional frame to be fixed for strengthening the partition. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
2	Low Height Partition	Sq. ft.	43.00		
	Half Height partition to be made with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5" sections, spacing of 2'0"x2'0" on both sides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and white colour laminates for base on both sides with all necessary fixing accessories, arrangements and etc. Partition shall have 12mm thick etched glass and fixed with teak wood beading with melamine polish. Clear glass shall be finished with frosted film sticking over the glass of approved pattern and design. The height of the glass should be from 3'-0" to 4'-6". Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				





यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust




Azadi Ka
Amrit Mahotsav


3	Full Ht.7'-0" but for Cash Cabin) (Cash Cabins) Solid till 4'-0" then Aluminium Decorative Grill height till 7'-0" then again solid Decorative Grill (12mm thk)-hexagonal opening as per instruction of Bank's Engineer/Architect.) All exposed edges of Plywood shall be fixed with 1/8" C.P. Teak Lipping. Providing and fixing of Cash Enclosures at height of 7'-5" with Anodized aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75" section, spacing of 2'0"x2'0" on bothsides and covered 9mm thick BWP plywood finished with 1mm thick laminate of blue, red colours for skirting & borders, white colour laminates for base colour. Partition shall have provision for opening and 19mm BWP plywood tray for challan receiving purpose. Cost include aluminium grill and fixed with teak wood beading and duco paint. Cost also include 3 Nos of Solid core flush Doors with sizes of 2'6"x7'0", fixed in the partition. Door shall have teak wood beading and lipping with duco paint. Door finished with 1mm thick laminate of white colour for base and red & blue for skirting of approved pattern. Door shall have 8mm glass fixed with teak wood beading and duco paint. Rate to include hardware's like brass hinges, godrej three nos of night latch, door closure, door stopper and handles. Cost also include cash transaction opening shall be provided with door arrangements made with BWP plywood frame work finished by laminate, duco paint and locking system. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.	Sq.Ft.	117.00		
4	Cash Cabin- Aluminium Grill Top with teak Decorative Grill Partition).	Sq.ft	44.00		






	Providing and fixing of Aluminum grill work in cash counter top with all necessary fixing support of 'L', 'H' and 'C' aluminium sections and etc. Cost include 'L', 'H' and 'C' aluminium sections, hardwares, tools, wastages, lead, lift, labour charges, loading, unloading charges, cutting, transport and etc. Complete as per instructions of the Architect.				
5	Front Counter	Rft	27.00		
	A. Running counter as per the drawing				
	Providing & Fixing clerical counter made out of 19.0mm thick BWP ply frame work for top, verticals, shelves, apron, sides, drawer unit, shutters, side units, customer top, foot rest, 12.0mm thick BWP ply for drawer sides, sliding shutters, front apron & 6mm thick ply for side unit back, drawer bottom, along with necessary 2" X 2" or 1.75" X 1.75" teak wood beading. Laminate matching imported wood molding & teak wood supports for fixing of top. The clerical counter shall have 2'-6" in depth & counter shall have top i.e. one at 2'-6" height finish in approved make/ color 1.0mm thick laminate etc. complete. The clerical counter shall have 1 No. of key board tray, 2 Nos. of equal drawers or as per the Bank requirements & one openable shutter. All exposed surfaces i.e. apron, counter side etc. finish with approved make/color 1.00mm thick laminate & moulding finish with 3 coats of melamine polish and internal surfaces shall have polish along with necessary approved Stainless Steel.				
	Hinges, Ball Catches, Stainless Steel Locks, approved design Stainless Steel Handles, Stainless Steel Powder Coated Grommet (wire manager), Wood Foot Rest (Movable) Earl-Bihari make Twin Telescopic Channel, CPU Hanger/Trolley INNOFIT make etc. complete as per detail drawing and instructions of the Bank's Engineer/ Architect.				






6	Cash Counter	Rft	5.00		
	A. Cash counters as per the drawing				
	Providing and fixing into position Cash counters as per detailed drawing made of Phenol bonded 19mm thick BWP commercial board finished with 1.0mm thick BWP laminate on top, front and sides as per detailed drawing. The front member of the cash counter to continue to 3'-8" height. At 3'-8" m height a projection of 15cm extended towards the customers side while a projection of 25.5 cm will be extended towards the staff. The outward projection to be made of 19 mm thick phenol bonded commercial board finished with 1mm thick laminate top. The counter to have one drawer unit of 3 drawers & space for CPU. 2 drawers to have division for cash as banks specifications. The exposed edges to have TW beading as in the design.				
	The item included all hardware such as channels of glydo/ hettich/ flyrail, self closing hinges/ locks/ handles/ laminated keyboard tray, Other hardware etc. The exposed surfaces to be finished with 1mm thick laminate of approved shade. Provision of footrest to be made as specified. All exposed wooden surfaces to be finished with clear melamine polish as approved by the Architect. All unexposed surfaces to have synthetic enamel paint with primer, all complete as per detailed drawings and direction of the Architect. The counter to have provision for cable manager and keeping mouse.				
7	12 mm Thick Etched Glass For Cash Cabin's and Front Counter (Glass To Be Toughened)	Sq. ft.	62.00		






	Supplying and fixing 12mm thick toughened glass in bank front counter's and cash counter front side of approved length and width and fixed with "D" bracket and all necessary fixing accessories, arrangements and etc Each glass shall have four nos of "D" bracket. Cost include edge machine polish in glass. Cost include making holes for transaction purpose for each glass, wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect. Measurements shall be made actual laid quantity in SFT.				
8	Wicket Gate Solid	No.	1.00		
	Supplying and fixing Wicket door of size (3'-0"x2'-6" Height x 1 no) to be made with 19mm thick BWP plywood shutter and frame work with all necessary fixing accessories, arrangements and etc. Door both sides shall be finished with 1mm thick laminate of blue, red colours for skirting & border and white colour laminate for base colour on both sides. Plywood edges to be finished with edge band of approved colour. Teak wood frame shall be used in hinges side with duco paint of approved colour. Cost include nesscessary hardwares like screws, tower bolt and etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect. (Incl Door Closer/Stopper/mortice lock)				
9	Main Entrance Toughened door with Etching	Sqft	24.00		
	Provoding and fixing of door with side panel with 12 mm toughened glass complete with Ozone Patch fittings including Top Patch (OPF-02) Bottom Patch (OPF-3) Angle Lock (OPL-1) Top Pivot (OFS-ACC-GDP) Floor Spring (FS8400) and				





	handle (OGH)32x457				
10	Fixed Toughened Glazing with Etching	Sqff	12.00		
	Provoding and fixing of 12 mm toughened glass complete with Ozone Patch fittings including Top Patch & Bottom Patch				
11	Mineral Fiber ceiling with UNI T 15mm T Grid & 16mm MPRESSIONS™ ClimaPlus™ Ceiling files (600x600mm)	Sq.Ft.	476.00		
	This includes USG Knauf UNI T 15mm grid Wall angle of 19mmx 19mm x 0.40mm shall be screw fixed to brick wall/partition with the help of approved screws at 600mm centres. Then suspending USG Knauf UNIT 15mm Main T grid of 15mm x 38mmx0.30mm of length 3600mm is hung with USG Knauf adjustable level clips 80x30x0.70mm & 4mm diameter GI rod which are connected to USG Boral Soffit Cleat 37mmx27mmx1.6mm and 8mm dia 40mm long Anchor Fasteners @1200mm centres or as approved from RCC Slab. The USG Boral UNIT 15 Cross T of 15mm x 38mmx0.30mm of 1200mm length shall be interlocked between main T Grid at 600mm centres to form 1200 x 600mm modules. 600 x 600mm modules to be formed by click fitting USG Knauf UNIT 15 Cross T of 15mm x 38mm of 600mm length centrally between the 1200mm cross T's Then 16mm thick IMPRESSIONS™ ClimaPlus™ ceiling panel having FLB edge of size 595x595 shall be placed into the above grid of size 600x 600 mm.This ceiling panel confirms to ASTM E84 surface burning characteristics. (Class A, Flame Spread: 25 & Smoke developed: 50). The Ceiling panel provides NRC 0.60, CAC minimum: 33. Light				






	Reflectance: 0.84, recycled content -45% Thermal Resistance: R- 0.3 & can withstand Relative Humidity up to RH 99% (limiting conditions -Max 49 degree C/99%RH). The front & back side of the tile has anti- Microbial ZOE coating				
12	False Ceiling Works (Gypsum)	Sq.Ft.	700.00		
	Supplying and Erecting Saint Gobain Gyproc Gypboard false ceiling at different heights with saint gobain framework of G.I. Section (of medium thickness) of spacing 4'0"x2'0" above with 12.5 mm gypboard shall be fixed with all necessary fixing accessories, arrangements and etc. Rate shall include cut-outs for lights, ac and etc.The ceiling shall be putty finished and sanded to form clean and homogeneous surface. Cost include hidden lighting arrangements and etc. Rate to include painting two coats of acrylic emulsion of approved colour after necessary preparation, one coat of primer, full putty and etc. Cost include all necessary hardwares like nails, screws, wastages, transports,				







	loading, unloading charges, labours, lead, lift, materials, tools and etc. Complete as per drawings and instructions of the Architect.				
13	Storage (Low Height / Full height Storage/ Overhead) Size-2'-6" highX 1'-6"deep	Sq.Ft.	80.00		
	Ply Wood -19.0mm thick board for side top and door & back 6.0mm IS 303 with shutters, shelf 19.0mm ply				
	Shelf -19.0mm thick BWP				
	Handle -Brush finish stainless steel				
	Lock -Vijayan/Godrej				
	Internal surface zinc oxide polish and other required accessories instructed by Bank's Engineer/Architect.				
14	Manager Table with Side Table and 12mm thick glass top	No.	1.00		
	Same as above complete work including 12 mm thick glass on top.				
	Size-5'-6" X 2'-6" X 2'-6"				






<p>(5'6" length, 2'6" width & 2'6" height) -Providing Table in position,Top shall be made of 19mm thick BWP comm. Board finished with 1.00mm thick laminate 1 3/4" x 1" teak wood beading as per design on all sides. The sides shall be made of 19mm thick BWP comm. board finished with 1.00mm th laminate as per design. with teak wood lipping on all exposed ends of sides The front apron shall be made of 19mm thick BWP comm. board finished with 1.00mm thick laminate as per design The drawers to be made out of 19mm thick comm. BWP board duly laminated in the front, sides to be made out of 12mm BWP comm. plyw and bottom to be made out of 6mm BWP comm. ply and it should play in drawer sliding channels. The inside of the drawer and the table to be duly paint.laminated. A legrest to be provided duly paint made out of 3"x2" thk wooden section. A shutter to be made by 19mm BWP comm. board cladded with 1.0 mm laminate. The necessary locks handles to be provided in each drawers and shutters. On top of the Branch managers table 12mm thk glass to be placed duly edge polished. The table should have key board tray and tea tray duly finished with 1.0 mm laminate. The necessary wire managers to be provided on the tables and provision for lights to be kept if required in the front of the table. (One coat of Ant termite treatment oil)</p>				
<p>Side Table-3'-0" X 2'-6" X 1'-6"</p>				
<p>Ply Wood-19.0mm thick BWR Grade for frame work</p>				
<p>Supports-2" X 2" & 2" X 1.5" CP Teak Wood and beading Patti</p>				
<p>Drawer-1'-6" wide two drawers and one shutter below the drawers at left side of the table and two drawers at side table and below two shutters</p>				
<p>Laminate-1.0mm thick approved colour</p>				
<p>Key Board Tray-Metal INNOFIT make</p>				






यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust




	CPU Metal Stand, Twin Telescopic Drawer Fittings, Brass Powder Coated Wire Manager				
	Handle-Brush finish stainless steel, Brass Ball Catches 12.0 thick plain glass with edge polish at top of the table (Other Exposed Edge of Ply with half round beading with approved colour polish)				
15	Manager Assistant Table with Side Table and including 12 mm thick glass on top.	No	1.00		
	Size-5'-6" X 2'-6" X 2'-6"				
	Other specifications as above				
16	Writing Table & Brochure Holder, Cheque Drop Box, Suggestion Box with Notice Board. (The work shall be executed as per design and Elevation.	No.	1.00		
	Providing and fixing in position a writing counter with open storage made of 12mm and 19mm thick BWP ply/ commercial board finished with 1.0mm laminate and teak wood moulding/ lipping with a 6mm glass top with polished edges as per drawing and design.The glass to be of size to fit internally and the 19mm border and 6mm lipping to be flushed with the glass. The storage unit shall consist of vertical space dividers of 12 mm board with 1.0 mm laminate fill the glass top for the provision of holding withdrawl/ deposit slips stationery etc.The counters to be held in position around the columns by dash fastners at a height of 3.5/ 4 ft. Notice board with cellotex base & cloth bound in corporate coloured binded with teak wood lipping of 35 by 12 mm.size 1500X1200.All wooden surfaces to be finished in clear melamine polish and all unexposed sides to be finished in enamel paint of approved colour to be approved by the designer all complete as per detailed drawing, specification and direction of the Engineer in				





	Charge.				
17	Wall Panelling & Column Pannelling	Sq.Ft.	418.00		
	Column Panelling -upto false ceiling height only considered and above necessary ceiling supports shall be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75", spacing of 2'0"x 2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and base colour laminates for base colour.Rate to include providing cutouts and provisions to run electrical conduits, switches, etc.Cost include necessary hardwares like clamps, screws and et Cost include provisions for electrical db closing 19mm thick BWP plywood door arrangements, wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				




युको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust



	Wall Panelling-up to false ceiling height only considered and above necessary ceiling supports shall be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75", spacing of 2'0"x2'0" on both sides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and white colour laminates for base colour. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include necessary hardwares like clamps, screws and etc. Cost include provisions for electrical db closing 19mm BWP plywood door arrangements, wastages, transports, loading, unloading charges, labours, materials, tools, ead, lift and etc. Complete as per drawings and instructions of the Architect.				
18	Shutter Boxing with A.C.P. (Boxing with Trap door)	Sqft	0.00		
	ACP Panneling & Rolling Shutter Box.				
	Frame Work-2" X 2" X 1.5 mm thick Aluminium Tubular section (Horizontal/Vertical) Jindal Make				
	Aluminium Composite Panel-3.0mm thick of approved colour with bonding material.				
19	Meter Boxing (Only front face to be measured for payment purpose)	Sq.Ft.	38.00		
	Manufacturing, supplying and fixing box type metre storage with overall depth of 1'6" and height as per the size of the mitre. comprising of the following.				
	19mm BWP block board hinged double shutter, height as size of the panel with around beadings 3/4" x 1/2", powder coated handles, piano hinges, magnetic ball catches, lock, locking arrangement, tower bolts etc., all as per directions.				





यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust




	All visible surfaces to be fixed with 1.0mm thick lamination sheet with matching grains & grooves as per instructions				
	All internal & rear surfaces to be painted with two coats of enamel paint over a coat of primer/putty as directed to get a smooth finish and 4nos-6" wide Powder Coated 2 nos Aluminium Aircon Louvers.				
20	Acrylic Emulsion with POP Base.	Sq.Ft.	3500.00		
	Providing & Applying painting of inner walls of Asian "Ace" / ICI make applied over the existing wall surface with 2coats of emulsion paint, surface preparation, 1 coat of primer and putty complete. Properly scrapping and sand papering the existing wall painting surface and putty with neat line and level. Unit-SFT. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per instructions of the Architect.				
	The rate shall include cost of all materials such as plaster of paris, whiting /primer, glue (Fevicol), indigo/stainer, brushes, sand paper, patti, dhoti, broom stick, clean water with storage and othercontainers, labour, scaffolding / ladder charges, cleaning of floors and other sundries etc., all complete to the satisfaction of the Architect.				
	TOTAL				

Note: All rates are excluding G.S.T.

Sl. No.	Materials	Approved manufacturers / suppliers
1	Paint	I.C.I. (Dulex - Duco) / Asian paints / GoodlacNerolac





यूको बैंक
सम्मान आपके विश्वास का



UCO BANK
Honours Your Trust



2	Plywood	BWR- Century/Green/Archid only Premium quality
3	Wood preservative	BWR- Century/Green/Archid only Premium quality
4	False ceiling	Armstrong , Indian gypsum board
5	Laminates	Sunmica/ Archid/Century/Green 1mm thick as per bank approved color
6	Screws	G.K.W./Nettle fold
7	Adhesive	Fevicol SH
8	Night latch	Godrej
9	Locks	Godrej
10	Aluminium door frame	Jindal
11	Glass	Modi/Asahi/Saint Gobain
12	Aluminium cladding	Eurobond/Altobond/Alukbond
13	Key board drawer	EBCO
14	Telescopic CPU stand	EBCO
15	Cable organiser(wire manager)	EBCO
16	Vitrified tiles	JhonsionsPerlto
17	Venetion blind	Vista, Luxaflex

Note : Plywood mentioned in the drawings as well as in bill of quantities should be IS: 710 BWR- Century/Green only Premium quality.

(Signature of bidder with seal) _____

Name _____

Designation _____

Note: The Bank reserves the right, neither to execute all items of work nor to execute the full quantity of items, as mentioned in schedule of quantitie







BILL OF QUANTITY FOR ELECTRICAL WORKS

UCO BANK, BANGARMAU BRANCH

S.No.	Particulars	Unit	Qty.	Rate	Amount
	The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 750mm interval & finally finishing the surface & matching the same with the existing surface. Item 1,3, 4 & 5				
	The rate should include the cost of all materials, modular switch complete with MS box & cover plate, labour, T&P, taxes & levies, scaffolding, shifting of furniture, carting away the debris and cleaning the floor etc				
1	L&F Point Wiring, Circuit wiring & Power Point wiring				
	L & F Points				
1	Primary Point Wiring for light points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The rates shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controlling SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Point	44		
2	Secondary Light Point				
	Same as above but looped from PP with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall be complete & to the entire satisfaction of the Bank.	Point	24		






3	6 A switch socket points on Sdb: S/F of 6A switch points with an additional indicator and 6Amp. modular Type switch & socket. It shall have 3*1.5sq.mm FRLSH stranded Cu. Wire as per requirement. The job shall be complete & to the entire satisfaction of the Bank.	Point	13		
4	Point Wiring for wall fan points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partifions or above false ceiling as per requirement. The job shall also included S/F of 6A switch socket near wall fan for regulating the same. The job shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controloing SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Each	12		
5	Point Wiring for Ceiling fan points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partifions or above false ceiling as per requirement. The job shall also include S/F of <i>modular electronic regulator in SDb</i> for regulating the same. The job shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controloing SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Each	3		





6	Point Wiring for exhaust fan points controlled thru modular switches complete with boxes & cover plate - The point wiring shall be carried with 3*1.5sq.mm FRLSH stranded Cu. Wires in 20mm PVC conduit pipe concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall also included S/F of 6A switch socket near wall fan for regulating the same. The job shall include cost of circuit wiring with 3*1.5sq.mm FRLSH Cu stranded wires in 20mm OD PVC Pipe from nearest TPN Db to controloing SDb. The job shall be complete & to the entire satisfaction of the Bank. Each Switch board should be provided with suitable capacity fuses/ fuse indicator	Each	3		
LOM	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
	<u>Power Point Wiring</u>				
1	Primary Power Point: Raw power points on workstations / table / Printer etc using 3*4 Sq.mm FRLSH Cu. stranded wire laid in 20mm OD PVC pipe medium conduit pipe laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. Each power point shall also consists of 1 nos of 16A , 2/3/5 pin sockets & 1 No., 16A Switch , wired together forming one point. The earth wire of green color only.	Point	10		
2	Secondary Power Point: Raw power points on workstations / table / Printer etc using 3*2.5 Sq.mm FRLSH Cu. stranded wire laid in 20mm OD PVC pipe medium conduit pipe laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. Each power point shall also consists of 1 nos of 16A , 2/3/5 pin sockets & 1 No., 16A Switch , wired together forming one point. The earth wire of green color only. Secondary P to b einterlooped with Primary PP. Maximum length 6m.	Point	3		




यूको बैंक
सम्मान आपके विश्वास का



UCO BANK
Honours Your Trust





	Total 3nos. - 1 for BM + 2 for 4 officers on LHS counters				
LOM	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
2	<u>Air - Conditioning</u>				
1	AC Point: Providing AC points with circuit wiring with 3*4sq.mm FRLSH Cu stranded wires to be laid in 20mm PVC medium concealed in wall/ floor/ panelling/ partitions as per requirement. The work shall include S/F of MCB protected power unit for AC c/w 40A 2P MCB including proper connections. The job shall be complete & to the entire satisfaction of the Bank.	Point	6		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	MCB Protected Power unit c/w10kA MCB "C"- Havells/ L&T/ Siemens/ Schnider				
3	Wiring with 3*4.0sq.mm FRLSH stranded Cu. wires laid in 20mm OD PVC/ flexible pipe heavy duty laid on floor & concealed in wall/ floor as per requirement to various voltage stabilizers. The job includes making connections at both ends with proper size of lugs to the entire satisfaction of the Bank.	m	21		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	<u>UPS</u>				
1	<u>UPS supply regulating Changeover:</u> S/F of 63A 4P changeover near panel for regulating UPS supply including proper connections. The supply shall be tapped from TPN Changeover for branch outside panel.	Each	1		





	<u>When branch is closed this change over shall always remain in "ON" position. It will enable supply to UPS even when branch is closed in evening.</u>				
	Changeover Switch- C&S/ Havells/ L&T/ HPL				
2	Incoming supply to UPS room: S/laying of 4 core 6sq.mm XLPE insulated armoured Copper conductor cable from main Panel to 4way TPN Db in the UPS room to be laid in medium duty 20mm PVC conduit/ pipe & run on surface or concealed in wall/ floor/ false ceiling including connections at both ends with lugs.	m	26		
	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
3a	S/ F of 4way SPN Db metallic c/w 32A 4P MCB including all connections complete in all respects to the entire satisfaction of the Architect/ bank.	Each	1		
3b	S/ F of 2way SPN Db metallic c/w 32A 2P MCB including all connections complete in all respects to the entire satisfaction of the Architect/ bank.	Each	2		
	Distribution Boards Double door in steel sheet housing - ABB/ MDS/ Lexic/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
4	Supply & laying of incoming & outgoing wiring to & from UPS with 3*4 sq.mm FRLSH stranded Cu. Wires laid in 20/25 mm flexible PVC pipe medium duty to UPS incoming & from UPS outgoing.	m	10		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				





यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust



Azadi Ka
Amrit Mahotsav


5	UPS Output Db in UPS Room - S/F of 12way SPN Db c/w 40A 2P MCB in comer and 32A 2P branch + 2*16A 2P MCB's for FDAS & CCTV as oiutgoing feeders including proper connections thru lugs. The job shall be complete & to the entire satisfaction of the Bank.	Each	1		
	Distribution Boards Double door in steel sheet housing - ABB/ MDS/ Lexic/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
6	UPS Output Distribution Boards				
a	Branch				
	Location on RHS wall - S/ F of 12way SPN Db c/w 40A 2P MCB and 6nos. 6A 1P (2 cash, 1 AM, officer beside c/c & 2 routers) +3*16A 1P MCB for BM & 4officers on LHS counters complete in all respect and as required & to the satisfaction of the bank.	Set	1		
	Distribution Boards Double door in steel sheet housing - ABB/ MDS/ Lexic/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
7	Supply & laying of incoming wiring from UPS Db in UPS room to UPS output Db near cash cabin with 3*4 sq.mm FRLSH stranded Cu. Wires laid in 20/25 mm flexible PVC pipe medium duty complete in all respects	m	18		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
8	Supply & Installation of point wiring for UPS power plug points on workstations / table for computers using 3*1.5 Sq.mm copper conductor multi stranded FRLSH wire pulled through floor raceways/conduit and taken upto table top using PVC rigid or flexible conduits run within wooden/metal partitions. Each point consisting of 3 nos of 6A , 2/3 pin sockets & 1 No., 16A Switch wired together forming one point. The earth wire	Each	12		







	of green color only.				
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolux/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
4	<u>DISTRIBUTION MAINS</u>				
1	S/F of 3 nos. 100Amp 415V Kit kats rewirable Porcelain fuse carrier & base with extension strips c/w 4 hole heavy duty neutral terminal including making of connection from electronic meter c/w wooden board etc.	Set	1		
	SFU/ Fuses- HPL/ L&T/ Siemens/ GE Power/ Schnider (MG)				
2	<u>Main Incoming Panel</u>				
	SITC of main distribution board panel fabricated of 18swg (powder coated) comprising of	Each	1		
	Indicator lamps 3 nos.				
	Voltmeter & ammeter (one each) c/w rotay switches and CT's for Ammeter				
	Busbar 1nos. - (each of RYB +N) Copper 100A each				
	Incomer - 100A 4P MCCB adjustable 25kA				
	<u>100A 4P Changeover outside Panel - Item 3 below</u>				
	<u>Outgoing</u>				
	<u>UPS</u>				







	To be tapped/ connected from incoming side of the c/o outside panel				
	<u>From Main Bus</u>				
	63A 4P MCB- 3nos. - 2no. HTPN Db (LHS & RHS) + 1 spare				
	32A 2P MCB's - 4nos. for Strong room, Record room, signage and 1 spare				
	Earth bus bar 25x5mm GI strip - 2nos. At the bottom.				
LOM	Ammeter, Voltmeter- AE/ L&T/ Meco/ Rishab				
	Selector Switch, Push Button switch/ Emergency switch- Kay Cee/ L&T/ Siemens/ Schnider				
	Indication Lamps- AE/ L&T/ Siemens/ Schnider				
	CT's- L&T/ AE/ Kappa				
	AT's- L&T/ Siemens/ Schnider/ Legrand				
	MCCB- Legrand/ Schnider (MG)/ ABB/ Siemens/ L & T				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand				
3	<u>Changeover:</u> S/F of 100A 4P changeover near VTPN Db panel for regulating DG set supply including proper connections.	Each	1		
4	S/ laying of XLPE insulated armoured Aluminium Conductor cables including cost of lugs, cable glands etc. The cable should be laid on surface with proper clamps @750mm or laid & concealed in wall/ floor/ PVC Conduit/ false ceiling complete in all respect. The work also includes cutting chases for conduits in the wall/ floor (Without damaging the building) along with clamping the cable. All connection shall be done thru proper size of lugs				
	3.5c 25sq.mm for Pole & fuse Kit Kats	Metre	25		
LOM	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
	Cable Lugs- Dowells				






5	S/ laying of XLPE insulated armoured Copper Conductor cables including cost of lugs, cable glands etc. The cable should be laid on surface with proper clamps @750mm or laid & concealed in wall/ floor/ PVC Conduit/ false ceiling complete in all respect. The work also includes cutting chases for conduits in the wall/ floor (Without damaging the building) along with clamping the cable. All connection shall be done thru proper size of lugs				
	4c x 16sq.mm for HTPN Db at GF	Metre	35		
LOM	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
	Cable Lugs- Dowells				
6a	SITC of TPN Db complete in all respects as under - Location LHS rear wall besides offices on counter	Each	1		
	LHS - 4way HTPN Db - Double door				
	Incomer - 63A 4P MCB				
	3no. 32A 1P MCB - BM, LHS counters & 1 LHS waiting				
	2no. 20A 1P MCB - Primary PP+ looped secondary PP - 2 for 4 officers on LHS counters				
	3no. 16A 1P MCB - 1 officers beside Cash & 2 separate for Router				
	4nos. 10A 1P MCB for L & F				
	Blanking Plates -NIL				
	All connection shall be done thru proper size of crimped lugs				
6b	SITC of TPN Db complete in all respects as under - Location RHS wall in customer area opposite cash cabin- For LHS area including front utility area	Each	1		
	RHS - 6way HTPN Db - Double door				
	Incomer - 63A 4P MCB				
	4no. 32A 1P MCB - 2 RHS, 1 BM, 1 AM				





यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust



	1no. 20A 1P MCB - Primary PP+ looped secondary PP - 1 for BM				
	4no. 16A 1P MCB - 2 cash + 1 for D/W & 1 AM				
	6nos. 10A 1P MCB for L & F				
	Blanking Plates - 3no.				
	All connection shall be done thru proper size of crimped lugs				
LOM	Distribution Boards Single/ Double door in steel sheet housing - ABB/ Legrand/ Siemens/ HPL				
	MCB- 10kA "C" Characteristics L&T/ Siemens/ Schnider/ Legrand/ Havell				
7	Strong room/ Record room controlling DP MCB - Circuit wiring with 3*1.5sq.mm FR LSH stranded Cu. wires laid in 20 mm PVC pipe OD medium duty laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job also includes supply & fixing of 32A 2P MCB in 2way metallic box including connections with lugs. The job shall be complete & to the entire satisfaction of the Bank. (to be fixed o/s Strong & record room for controlling lights)	Job	2		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Modular Switch/ Sockets - ABB/ Legrand/ MK/ Anchor/ Elleys/ Roma				
8	Glow sign Board - Circuit wiring with 3* 2.5 sq.mm FRLSH stranded Cu. wires laid in 20 mm PVC pipe heavy duty laid & concealed in wall/ floor/ panelling/ partitions or above false ceiling as per requirement. The job shall be complete & to the entire satisfaction of the Bank.	m	12		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				

GA
33



8	Timer - Supply of 40 A SP 230 V analog time switch panel(TIMER), in manufacturer sheet steel panel, fully prewired with all components like time switch, MCB, contactor, selector switch, indicating lamp.(1 for sign board)	Nos.	1		
	Timers- L&T/ Legrand/ Schnider/ Siemens/ GE				
5	<u>DG SET SUPPLY</u>				
1	S/laying of 3.5c 25sq.mm XLPE insulated armoured Aluminium Conductor cable c/w 1*6sq.mm stranded copper wire for earthing from proposed DG set to Changeover switch including its connections at both ends with lugs to be laid in 25mm dia rigid PVC /flexible conduit	m	12		
LOM	Cables Armoured/ Unarmoured - Finolex/ Polycab/ Havells/ RR Kabel/ KEI				
	Cable Lugs- Dowells				
	<u>IN SCOPE OF DG SET VENDOR</u>				
6	<u>EARTHING</u>				
1	<u>For Panel</u>				
	S/burying of Dual pipe technology earthing electrode having GI 65mm O/D pipe with 25 micron coating, 3metres long. The job also includes S/F of GI strip clamp with two holes (with SS/GI bolts & nuts) on the electrode & taking one lead of 4sq.mm Cu stranded wire (Cost of 4sq.mm wire extra as under) upto 4way earth link near main panel complete in all respects with guaranteed E/N voltage of less than 2 volts and resistance less than 1 ohms. The 4sq.mm Cu stranded wire shall be terminated on 4way earthlink. The connections for Panel earthing/ earth bus in the panel shall be taken from this earthlink. The distance between two earthing pits to be 10ft or more.	Job	1		
2	<u>For UPS</u>				





	S/burying of Dual pipe technology earthing electrode having GI 65mm O/D pipe with 25 micron coating, 3metres long. The job also includes S/F of GI strip clamp with two holes (with SS/GI bolts & nuts) on the electrode & taking one lead of 4sq.mm Cu stranded wire (Cost of 4sq.mm wire extra as under) upto 4way earth link near UPS complete in all respects with guaranteed E/N voltage of less than 2 volts and resistance less than 1 ohms. The 4sq.mm Cu stranded wire shall be terminated on 4way earthlink. The connections for UPS earthing/ UPS Db's earthing shall be taken from this earthlink. The distance between two earthing pits to be 10ft or more.	Job	1		
2	Supply & Fixing of 4sq.mm FRLSH Cu. Stranded wire on surface or in recess for loop earthing as required earthing to Db's or main panel as required.	m	30		
	PVC Insulated FRLSH Copper wire (ISI Marked)- Skyline/ Finolex/ Havells/ Polycab				
3	S/F of 4 way earth link	Each	2		
7	SUPPLY & FIXING LIGHT & FAN ITEMS				
1	S/F of Energy efficient recessed mounted LED luminaire - 30/32w LED recessed mounted 2'X2' luminaire suitable for grid ceiling with indirect lighting delivering soft and uniform light - Make as approved by Bank/ architect	Each	21		
	Light fittings - Philips/ Wipro/ Osram/ Havells/ Crompton Greaves				
	-				
2	S/F of recessed LED downlighter - 15w LED recessed mounted high performance low-height LED downlighter c/w robust PDC housing complete in all respects- Make as approved by Bank/ architect	Each	26		
	Light fittings - Philips/ Wipro/ Osram/ Havells/ Crompton Greaves				

UCO BANK
35





3a	S/F of Surface & wall mounted LED batten - Ultra-slim poly carbonate decorative LED batten with inbuilt heat sink, anti glare polycarbonate diffuser & energy efficient electronic driver 20W 1800 lumens - Make as approved by Bank/ architect	Each	14		
4a	S/F of Angle holder Anchor make c/w 8w LED bulb complete in all respects - Make as approved by Bank/ architect	Each	3		
	Light fittings - Philips/ Wipro/ Osram/ Havells/ Crompton Greaves				
5	S/F of wall mounted fan - 80/100watt metal body Fan - 450mm, 1300 to 1500RPM	Each	12		
	Fans- Crompton/ Havells/ Bajaj/ Usha				
6	S/F of energy saving/ efficient ceiling fan 1200mm sweep double ball bearing type Make as approved by Bank/ architect	Each	3		
	cost of electronic regulator to be quoted in CF point wiring as above.				
	Fans- Crompton/ Havells/ Bajaj/ Usha				
7	Supply & Fixing of metallic fresh air fan 230mm sweep - Make as approved by Bank/ architect	Each	3		
	Fans- Crompton/ Havells/ Bajaj/ Usha				
8	S/F of chime bell as approved by Architect	Each	1		
	Anhcor/ Havells				
8	<u>Telephone system</u>				





1	S/F modular telephone jack single with shutter outlet (RJ-11) with mounting box & front plate complete with chase cutting, mending good etc. as required including Supply & laying of 2 pair unarmoured 0.61mm dia. PVC insulated twisted pairs bunched together telephone cables through rigid 20mm dia PVC conduit as directed by the Bank/ Architect from telephone junction box to telephone socket outlet including interconnection as required complete in all respects.	Each	5		
	Telephone Wire -Delton/ Skyline/ Finolex/ Rallison/ Batra Henley				
2	10 Pair Tag box	Each	1		
	Telephone Tag Blocks- Krone/ Pouyet/ TVS				
3	MDS Box	Each	1		
	MDS box - Krone/ Pouyet/ TVS				
	Total Cost of Electrical works				
	DATA CABLING				
1	Supplying and laying D-link make CAT-6e Cable in PVC 20mm dia OD medium conduit complete with <u>CAT-6 information outlet with plate & surface Box at work tables marked as DP</u>	Point	10		
	PVC Conduit- CAP/ BEC/ Sieko/ AKG				
	Cable - Digi Link/ Clipser/ National/ Polycab/ Lapp/ Finolex				
	I/O- DigiLink/ Tyco (AMP)/ Schnider/ D- Link				
2	S/ F of 7ft Grey colour Patch chord	Each	10		
	Patch Chord- DigiLink/ Tyco (AMP)/ Schnider/ D- Link				
3	S/ F of 3ft Grey colour Patch chord	Each	10		





	Patch Chord- DigiLink/ Tyco (AMP)/ Schnider/ D-Link				
4	Dismantling & refixing of existing Rack, Patch Panel & Switch from the existing branch to the new proposed branch.	Job	1		
	Total for Data/ LAN Cabling				
	TOTAL FOR ELECTRICAL & DATA CABLING (A)				

Estimate for Air-Conditioning works for UCO Bank

at Bangarmau Branch Kanpur


Note:-

1. Each vendor to specify the Make of A.C. they propose to supply.
2. Common drain pipes of Cassette / Split A.C.'s be terminated in any toilet Nahni traps OR else be terminated from external wall up to ground. AC's with COPPER Condenser & Evaporator coils only to be supplied.
3. Pl. enclose Technical Brocher of quoted A.C.'s.
4. As built layout drawing of Refrigerant & Drain Piping has to be attached with Final Bill.

Voltas, Blue Star, Daikin. AC's with COPPER Condenser & Evaporator coils should only be supplied. Only one of these Makes to be quoted. Pl. enclose Tech. Brocher of the quoted Cassette/ Split A.C.

ALL NEW A C'S TO BE OF INVERTER TYPE

S.N.	DESCRIPTION	UNIT	QUANTIT Y	RATE	AMOUNT
	All a.c's to be inverter type.				
1	5 Star High Wall Split AC-1.0 Ton Inverter Type AC The High Wall Split AC to be of Voltas, Blue Star, & Daikin. are approved Makes.	No	2.00		
	Supply and Installation Of wall mounted split AC 1.0 Ton inverter type. with 5 year warranty on compressor and ecofriendly green gas.				





2	5 Star High Wall Split AC-1.5 Ton Inverter Type AC The High Wall Split AC to be of Voltas, Blue Star, & Daikin. are approved Makes.	No	4.00		
	Supply and Installation Of wall mounted split AC 1.5 Ton inverter type. with 5 year warranty on compressor and ecofriendly green gas.				
3	Providing & Installation of 4/5KVA voltage Stabilizers with range of 130 - 280V of standard make as per the approval of the Architect of (Inmag, Servel, Stambh)	No	6.00		
4	Drain Water Piping Constructed out of PVC Hard Pipes,fitting, accessories, bends, elbows, tees, hanger, support, anchors, ISI approved Finolex/Prince Make (32mm)	RM	52.00		
5	Rate for Extra Piping (Rate above 12 Feet pipe which will be free with each unit) Ref.Piping(Only single distance will be measured between Indoor & Outdoor Units)				
a	Copper Piping Refrigerant along with insulator Piping for Hi Wall 1.5 ton,1/2 and 1/4 Soft Copper Refrigerant piping with complete fitting, elbows bends supporting arrangements Nissan, Merchant, MET tube, Totaline tube, pressure tested tube and S.I.T.C. of 12.5 Sq.mm. & 6.25 Sq.mm. dia. Copper refrigerant pipe with foam Insulation between Indoor & Out door units with breaking of wall for making hole wherever required For Split Air- Conditioners. And S.I.T.C. of 19 mm dia & 16 mm dia Copper Refrigerant Pipes with Foam insulation between Indoor & Out door units.with breaking of wall wherever required for 2-3 Tr Casette/ Inverter Air conditioners.	Rm	95.00		
b	S.I.T.C. of 4 core Copper conductor flexible cable between Indoor &Outdoor Unit through holes made as above	Rm	95.00		





6	S.I.T.C. of L shape / suitable shape M.S. Frame and stand for mounting Outdoor Units on wall / On floor with all fixing hardware including lockable cage duly painted with enamel paint. Within above Catwalk for cassette & split A.c.'s.	No	6.00		
	Total For Branch (B)				
	Total For Branch				

Note: All rates are excluding G.S.T.


Note:-


1. Each vendor to specify the Make of A.C. they propose to supply.
2. Common drain pipes of Cassette / Split A.C.'s be terminated in any toilet Nahnitrap OR else be terminated from external wall up to ground. AC's with COPPER Condenser & Evaporator coils only to be supplied.
3. Pl. enclose Technical Brocher of quoted A.C.'s.
4. As built layout drawing of Refrigerant & Drain Piping has to be attached with Final Bill.

Voltas, Blue Star, Daikin. AC's with COPPER Condenser & Evaporator coils should only be supplied. Only one of these Makes to be quoted. Pl. enclose Tech. Brocher of the quoted Cassette/ Split A.C.


ALL NEW A C'S TO BE OF INVERTER TYPE

	List of approved materials	
	Materials	Approved manufacturers/suppliers
1	MCCB	MDS legrands, ABB, GE, SIEMENS
2	Changeover	Indo Asian/ HPL Socomec / GE/ Standard stangaurd
3	Distribution board	MDS / Standard / Indo Asian / HPL
4	MCB	MDS / Standard / Indo Asian / HPL





यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust



5	Cable	Gloster / Rallison / Incab / CCI		
6	Copper wire	Finolex/anchor		
7	Switch / Socket / Call bell and accessories	Anchor / Havells / CPL / MDS / Philips		
8	Electrical Light Fittings / Fixtures Complete	Philips		
9	Wall Fan / Ceiling Fan / Exhaust Fan	Khaitan/Havells		
	Daikin, Hitachi, BlueStar. Only one of these Makes to be quoted. Pl. enclose Tech. Brocher of the quoted Cassette/ Split A.C.	A.C.'s having Service centre in/Near the City should be preferred.		
	GST Will Be Extra			

Notes:							
1	The vendor shall visit the site and shall satisfy himself as to the conditions under which the work has to be carried out. In case of any doubt, the same should be got cleared from the Architect. No extra claim as a consequence of ignorance or on ground of insufficient description will be allowed at a later date. The Bank reserves the right at its sole discretion to ask for further Clarifications from any vendor/s if deemed necessary. The decision of the bank shall be final & binding to the vendor.						
2	The items given in this BOQ are provisional. The vendor shall be paid for the actual work executed at the rates tendered. The Bank reserves the right to increase or decrease any of the quantities, or to omit totally any item of work. Any claim by the vendor on these accounts will not be entertained.						
	Summary of AC, PP, CP, data Points & Telephone points	AC - 1TR	AC	PP	CP	Data	TP
		Split	1.5TR				

(Handwritten signature and stamp)



RHS						
BM Cabin	1	2	2	2	1	
Assistant Manager Cabin	1	1	1	1	1	
RHS						
Customer area + writing ledge	1					
Area opposite Cash cabins	1					
LHS						
Main Panel + waiting	1					
LHS counters 2 officers ckt 1	1	2	2	2	1	
LHS + front counters 3 officers adjacent to cash cabin	1	3	3	3	1	
Router		2	2	2	1	
Cash Cabins area						
Cash cabin - 1		1	1	1		
Cash cabin - 2		1	1	1		
D/w area		1				
Total	0	7	13	12	12	5


(Signature of bidder with seal) _____

Name _____


Designation _____

Note: The Bank reserves the right, neither to execute all items of work nor to execute the full quantity of items, as mentioned in schedule of quantities.





यूको बैंक
सम्मान आपके विश्वास का



UCO BANK
Honours Your Trust



BOQ of furnishing works

Sl. No.	Materials	Approved manufacturers / suppliers
1	Paint	I.C.I. (Dulex - Duco) / Asian paints / Goodlac Nerolac
2	Plywood	BWR- Century/Green/Archid only Premium quality
3	Wood preservative	BWR- Century/Green/Archid only Premium quality
4	False ceiling	Armstrong , Indian gypsum board
5	Laminates	Sunmica/ Archid/Century/Green 1mm thick as per bank approved color
6	Screws	G.K.W./Nettle fold
7	Adhesive	Fevicol SH
8	Night latch	Godrej
9	Locks	Godrej
10	Aluminium door frame	Jindal
11	Glass	Modi/Asahi/Saint Gobain
12	Aluminium cladding	Eurobond/Altobond/Alukbond
13	Key board drawer	EBCO
14	Telescopic CPU stand	EBCO
15	Cable organiser (wire manager)	EBCO
16	Vitrified tiles	Jhonsions Perlto
17	Venetion blind	Vista, Luxaflex


Note : Plywood mentioned in the drawings as well as in bill of quantities should be IS: 710 BWR-Century/Green only Premium quality.

(Signature of bidder with seal) _____

Name _____

Designation _____

Note: The Bank reserves the right, neither to execute all items of work nor to execute the full quantity of items, as mentioned in schedule of quantities.



BOQ of electrical + AC work


	List of approved materials	
	Materials	Approved manufacturers/suppliers
1	MCCB	MDS legrands, ABB, GE, SIEMENS
2	Changeover	Indo Asian/ HPL Socomec / GE/ Standard stangaurd
3	Distribution board	MDS / Standard / Indo Asian / HPL
4	MCB	MDS / Standard / Indo Asian / HPL
5	Cable	Gloster / Rallison / Incab / CCI
6	Copper wire	Finolex/anchor
7	Switch / Socket / Call bell and accessories	Anchor / Havells / CPL / MDS / Philips
8	Electrical Light Fittings / Fixtures Complete	Philips
9	Wall Fan / Ceiling Fan / Exhaust Fan	Khaitan/Havells
	Daikin, Hitachi, Blue Star. Only one of these Makes to be quoted. Pl. enclose Tech. Brocher of the quoted Cassette/ Split A.C.	A.C.'s having Service centre In/Near the City should be preferred.
	GST Will Be Extra	


(Signature of bidder with seal) _____

Name _____


Designation _____

Note: The Bank reserves the right, neither to execute all items of work nor to execute the full quantity of items, as mentioned in schedule of quantities.







यूको बैंक
सम्मान आपके विश्वास का




UCO BANK
Honours Your Trust

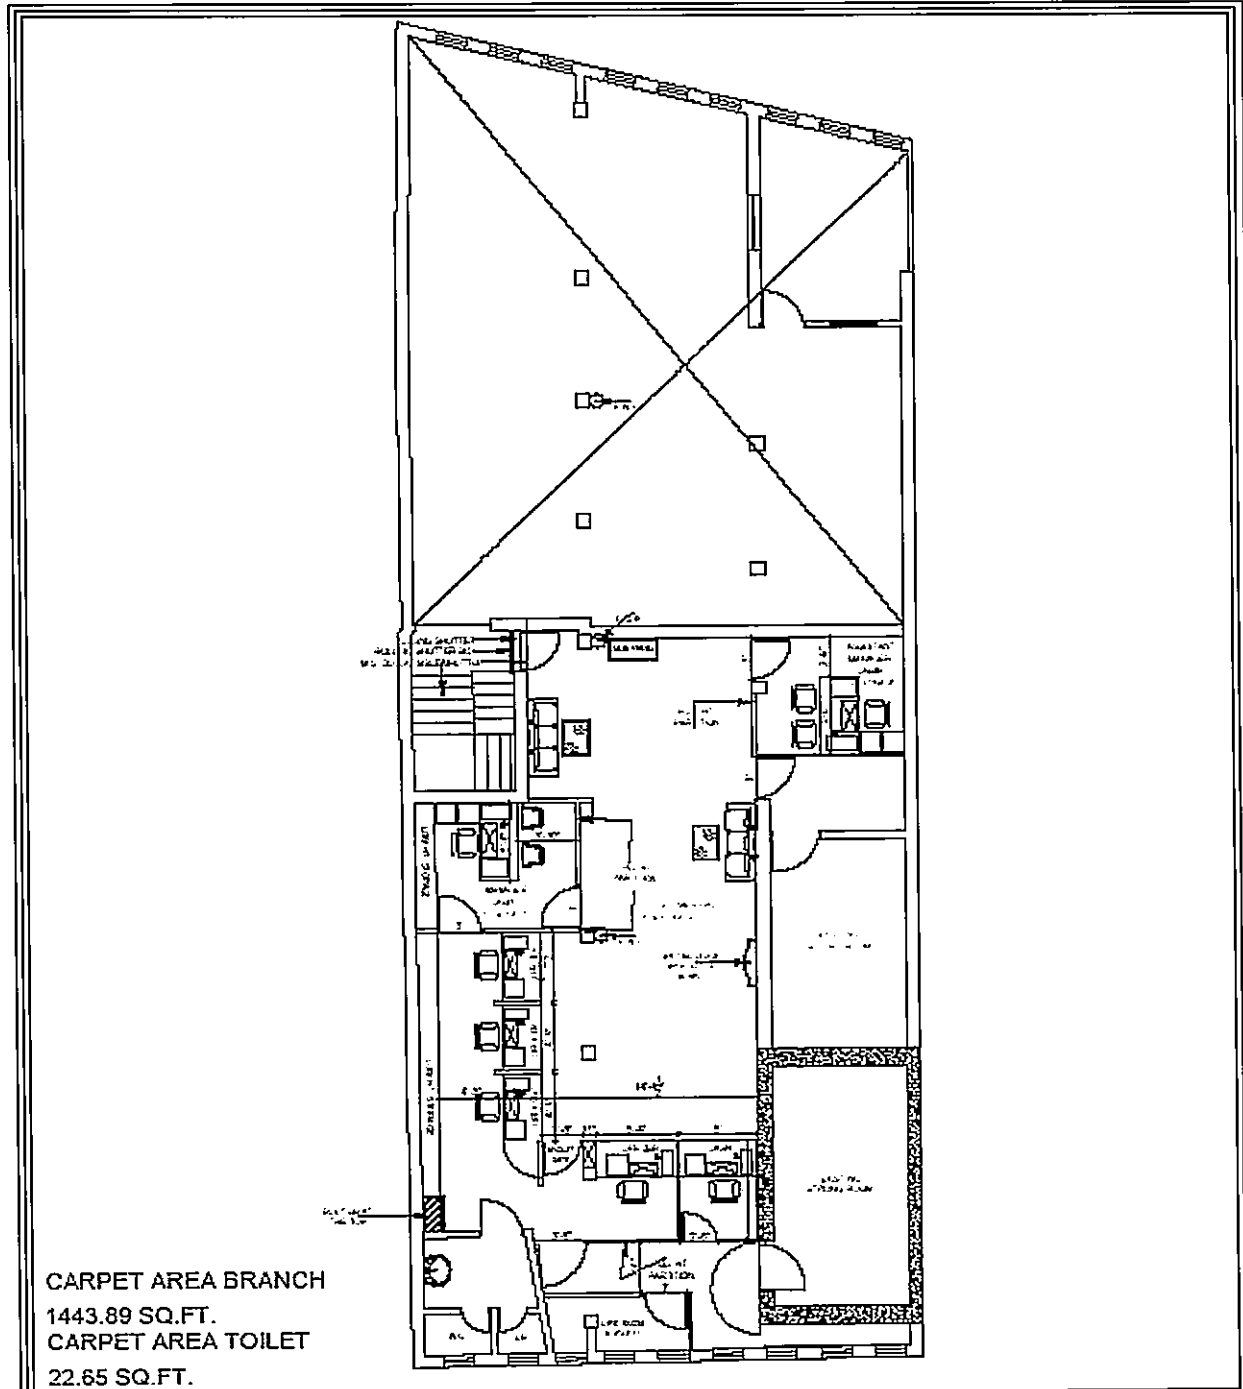


CARPET AREA BRANCH
1443.89 SQ.FT.
CARPET AREA TOILET
22.65 SQ.FT.

<p>PROJECT:- REVISED LAYOUT PLAN FOR UCO BANK BRANCH AT BANGARMAU KANPUR, UP.</p>	<p>DRG. TITLE:- FIRST FLOOR PLAN</p> <p>DATE:- JAN-2026</p>	<p>NORTH:- </p> <p>DRAWN BY:-</p>	<p>ARCHITECT:- GUNJAN & ASSOCIATES ARCHITECTS, ENGINEERS, INTERIOR AND LANDSCAPE DESIGNERS. 141, SAINIK NAGAR, LANE NO-9, RAEBARELI ROAD LUCKNOW-226002 Telephone No:- +0522-3553324 Phone No:- +9338818489, 9839018489 E-Mail:-studio@gunjanandassociates.com Web:-www.gunjanandassociates.com</p>
--	---	--	--






यूको बैंक
सम्मान आपके विश्वास का



UCO BANK
Honours Your Trust



Azadi Ka
Amrit Mahotsav

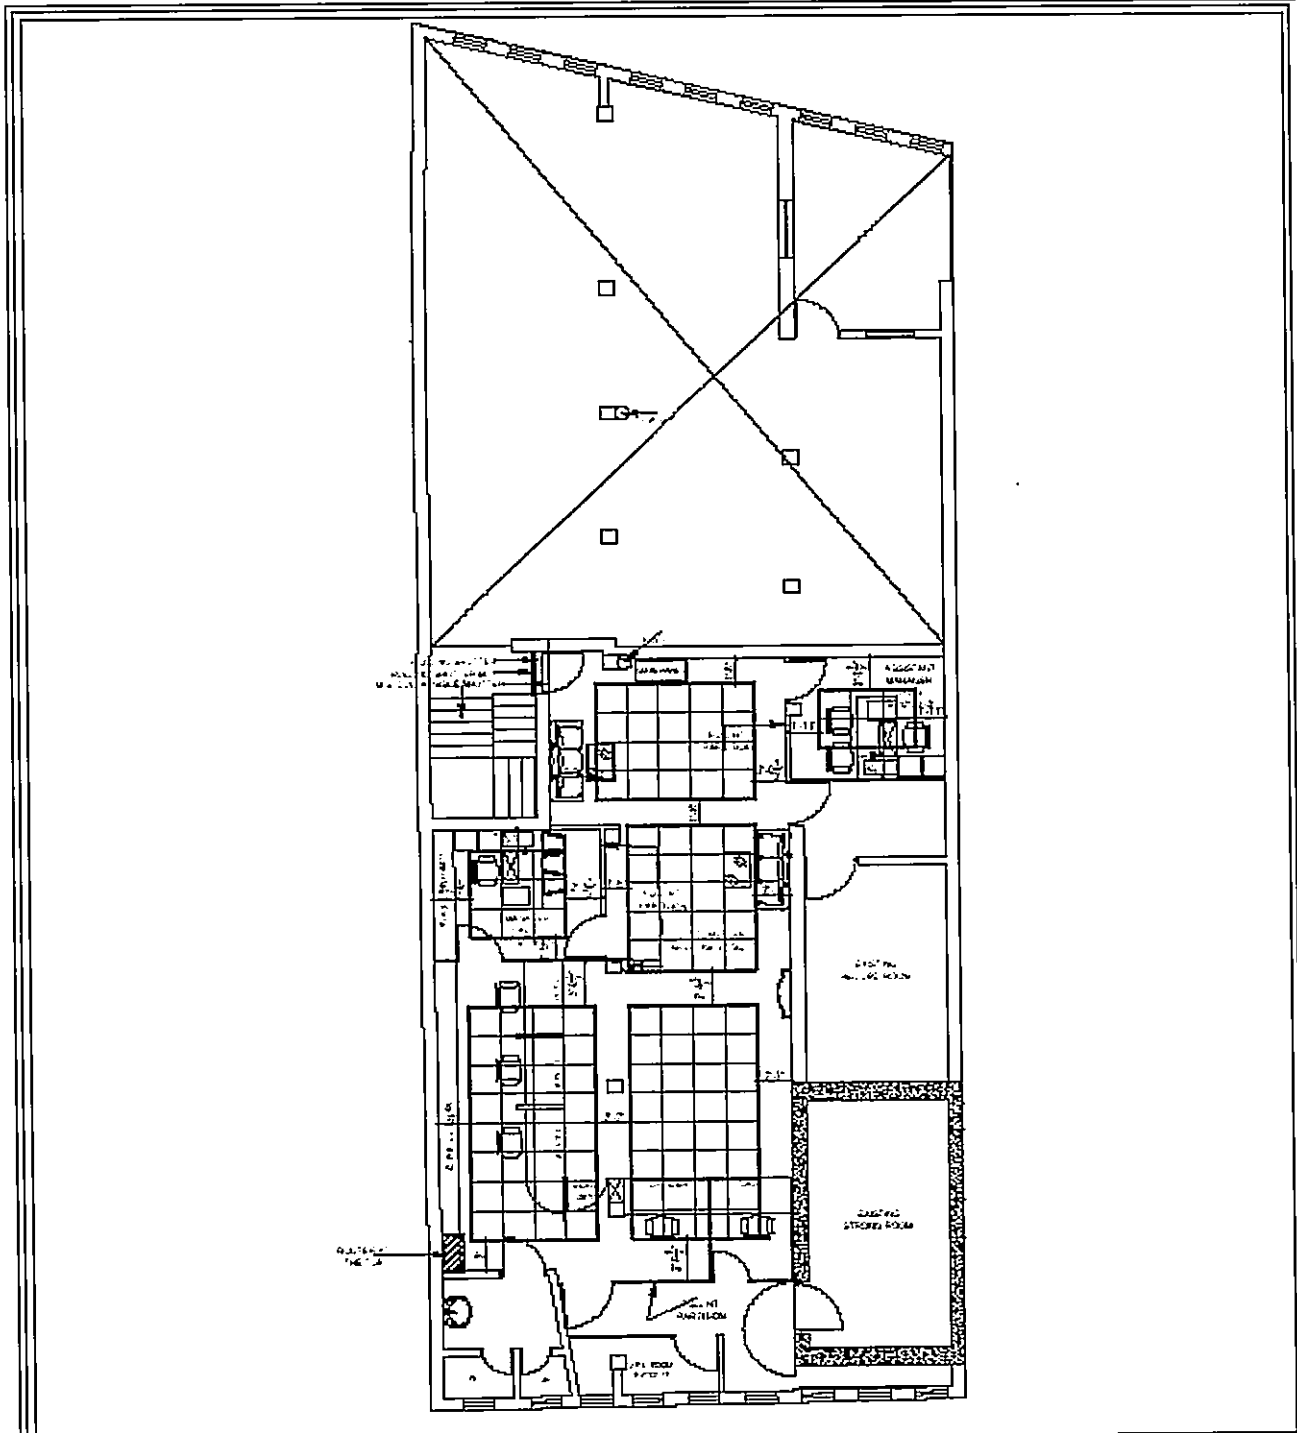

PROJECT:-
FALSE CEILING PLAN FOR
UCO BANK BRANCH AT
BANGARMAU
KANPUR, UP.


DRG. TITLE:-
FIRST FLOOR
PLAN





DATE:-
FEB-2026

DRAWN BY:-

ARCHITECT:-
GUNJAN & ASSOCIATES
ARCHITECTS, ENGINEERS, INTERIOR
AND LANDSCAPE DESIGNERS.
141, SAINIK NAGAR, LANE NO-9,
RAEBARELI ROAD LUCKNOW-226002
Telephone No:- +0522-3553324
Phone No:- +9838818489, 9839018489
E-Mail:-studio@gunjanandassociates.com
Web:-www.gunjanandassociates.com



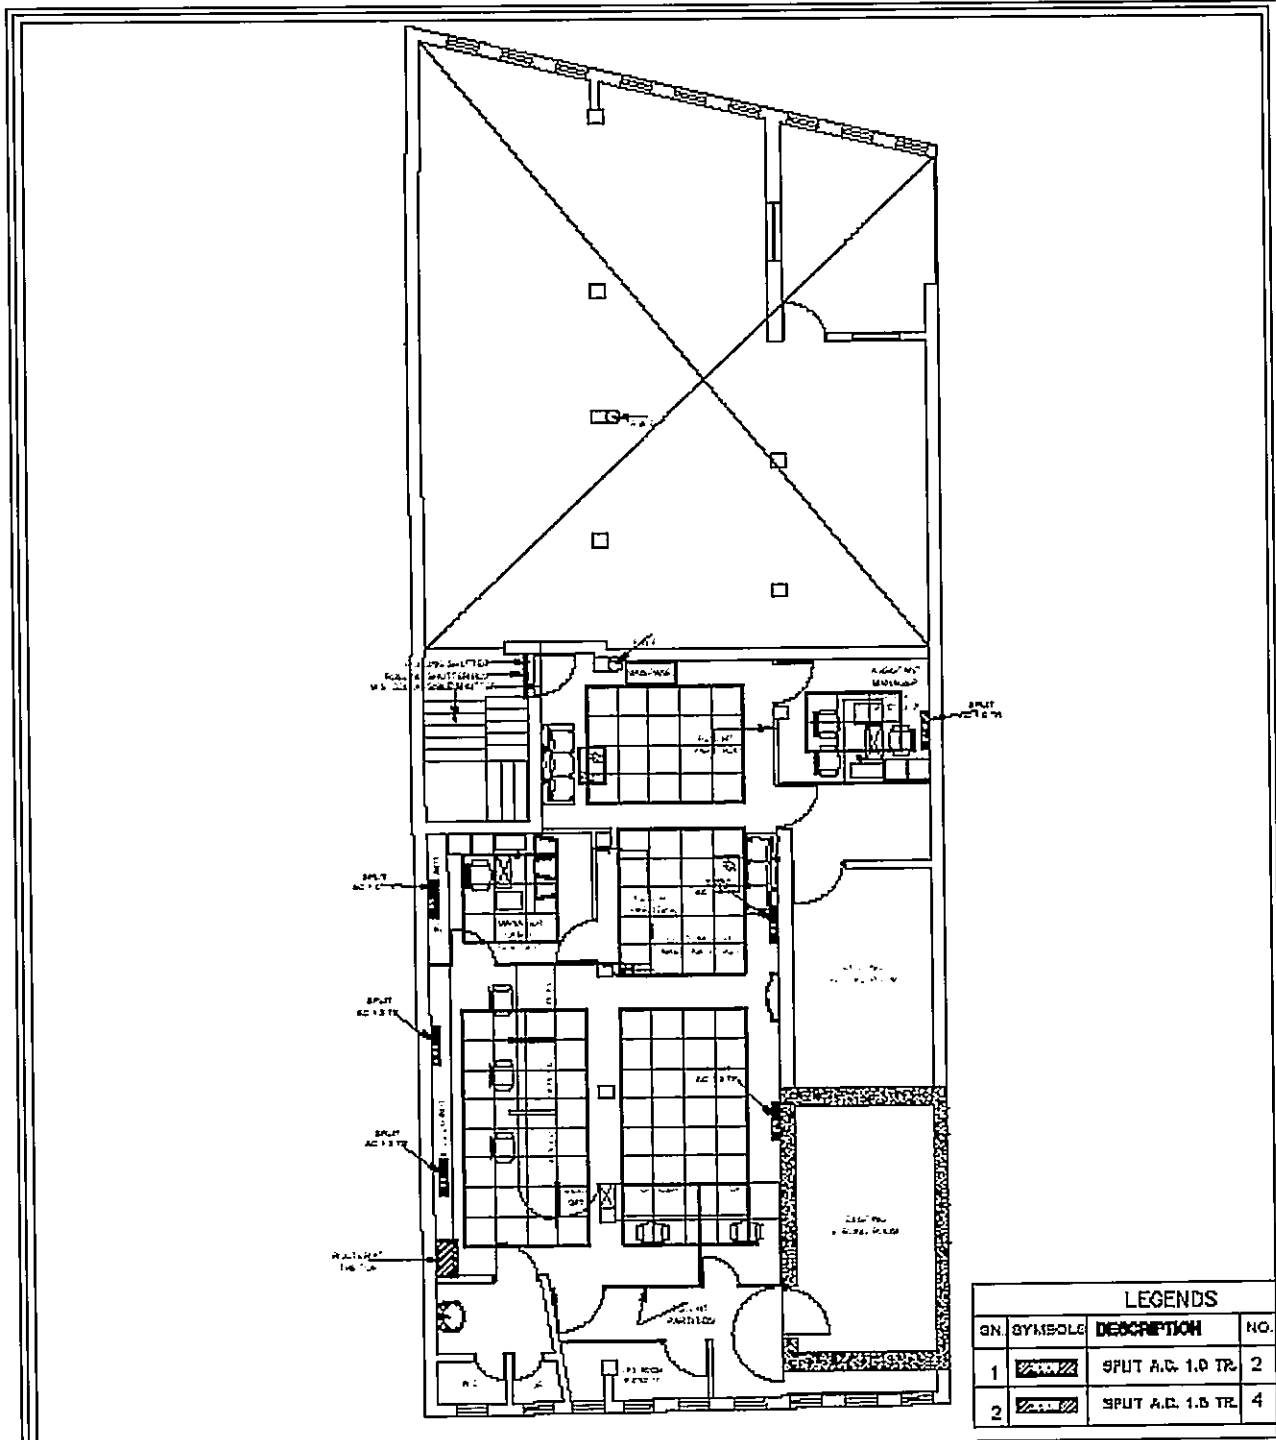

PROJECT:-

**FALSE CEILING PLAN FOR
 UCO BANK BRANCH AT
 BANGARMAU
 KANPUR, UP.**

DRG. TITLE:-

**FIRST FLOOR
 PLAN**

NORTH:-



DATE:-

FEB-2026

DRAWN BY:-

ARCHITECT:-

**GUNJAN & ASSOCIATES
 ARCHITECTS, ENGINEERS, INTERIOR
 AND LANDSCAPE DESIGNERS.
 141, SAINIK NAGAR, LANE NO-9,
 RAEBARELI ROAD LUCKNOW-226002
 Telephone No:- +0522-3553324
 Phone No:- +9838818489, 9839018189
 E-Mail:- studio@gunjanandassociates.com
 Web:-www.gunjanandassociates.com**