

ZOK/GAD/2026-27/10

Date: 10.04.2026

RFP for Furnishing work at Bank's Trijunction Branch situated at 7/110, Swaroop Nagar, Trijunction (Arya Nagar), Kanpur – 208002 Uttar Pradesh.

Part – I (Technical Bid)

The information provided by the bidders in response to this RFP Document will become the property of the Bank and will not be returned. The Bank reserves the right to amend, rescind or reissue this RFP Document and all amendments will be advised to the bidders and such amendments will be binding on them. The Bank also reserves its right to accept or reject any or all the responses to this RFP Document without assigning any reason whatsoever.

This document is prepared by UCO Bank for Interior Furnishing work at Bank's Trijunction Branch situated at 7/110, Swaroop Nagar, Trijunction (Arya Nagar), Kanpur – 208002 Uttar Pradesh. It should not be reused or copied or used either partially or fully in any form.

INDEX

k

Sl.No.	Particulars	Page No.
1	Notice Inviting Tender	1-3
2	Eligibility Criteria & Evaluation Criteria	4
3	REJECTION OF BID	4
5	ANNEXURE-I(DECLARATION)	5
6	ANNEXURE-II (TECHNICAL SPECIFICATION)	6
7	FINANCIAL BID-BOQ	7-48


Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

Linked In:UCO BANK; You Tube:UCO Bank Official



यूको बैंक
सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust




Disclaimer

While the document has been prepared in good faith, no representation or warranty, express or implied, is or will be made, and no responsibility or liability will be accepted by UCO BANK or any of its employees, in relation to the accuracy or completeness of this document and any liability thereof expressly disclaimed. The RFP is not an offer by UCO BANK, but an invitation for bidder's responses. No contractual obligation on behalf of UCO BANK, whatsoever, shall arise from the offer process unless and until a formal contract is signed and executed by duly authorized officials of UCO BANK and the selected Bidder.

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBANKOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



Notice Inviting Tender

UCO Bank invites sealed tender offers (technical and financial offer) from our empaneled contractors for Furnishing work at Bank's Trijunction Branch situated at **7/110, Swaroop Nagar, Trijunction (Arya Nagar), Kanpur – 208002 Uttar Pradesh.**

A) The bidder (also called the vendor or bidder through this document) selected through this bidding process shall own the single point responsibility for fulfilling all obligations and providing all deliverables and services required for successful implementation of the project.


B) Salient Features

Tender Reference	ZOK/GAD/2026-27/10 dated 10.04.2026
Name of the work	Furnishing works at Bank's Trijunction Branch situated at 7/110, Swaroop Nagar, Trijunction (Arya Nagar), Kanpur – 208002 Uttar Pradesh
EMD	a) EMD of 1) Rs. 5,000/- for furnishing work 2) Rs. 7,000/- for electrical & AC works. DD must be submitted with Technical Bid (Part-I) in the form of pay order /demand draft in favor of UCO Bank, payable at Kanpur. Not Applicable for MSME (Document related MSME to be furnished Under Part-I). b) EMD of unsuccessful bidders will be released (without any interest). c) EMD of L-1 bidders will be released (without any interest) after submission of Performance Bank Guarantee. d) However, if Successful tenderer withdraws their acceptance before completion of Work, UCO Bank will have the right to forfeit the Earnest Money Deposit without making reference.

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



Last date and time for submission of tender	Off line original hard copy of Part-I and Part-II of tender document to be submitted from 11.04.2026 to 20.04.2026 upto 16:00 hrs at UCO Bank, GAD, Kanpur Zonal Office, 75/4 Siddhi Sadan, Halsey Road , Kanpur -208001
Date of opening of tender	Technical and financial bids to be opened on 20.04.2026 at 16:30 hrs.
Time for completion	30 Days from issue of work order
Address of communication	UCO Bank, Kanpur Zonal Office General Administration Department 75/4, Siddhi Sadan, Halsey Road, Kanpur- 208001
Email	zokanpur.gad@uco.bank.in
Phone No.	8869935001, 8789356663
Architect for technical clarifications and drawings	M/s Gunjan & Associates Contact - 9838818489
Mode of submission	Offline hard copy
Contents of technical bid (Part-1)	a. Original Demand Draft of EMD (Not Applicable for MSME (Document related MSME to be furnished)). b. Bidder's Covering letter (Annexure 1) Empanelment Letter suitable for the said category Issued by any of our Zonal office.
Validity of tender	90 (Ninety) days from date of opening

C) Submission of tender

The envelope containing Part-I of tender should be super scribed clearly "Part-I (Technical Bid)" with the name of work and will be addressed to 'The Zonal Manager, UCO Bank Kanpur Zonal Office' and **must be submitted on or before the stipulated date & time of submission of tender.** The financial bid should be submitted in one big nonwindowed-envelope in the same envelope containing envelope of Technical Bid. The sealed envelope should be super-scribed as "Furnishing work at Bank's Trijunction Branch situated at 7/110, Swaroop Nagar, Trijunction (Arya Nagar), Kanpur – 208002 Uttar Pradesh"

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



1. The documents should be submitted to UCO Bank, Kanpur Zonal Office General Administration Department, 75/4, Siddhi Sadan, Halsey Road, Kanpur-208001 within stipulated time frame.

D) Miscellaneous Terms & Conditions:


1. Vendor's representatives will be allowed to be present during opening of bids at their cost.
2. In case date of pre-bid meeting, last date of receipt or opening of tender are declared as holiday, the respective date shall be treated as deferred and will be re-scheduled to next working day correspondingly.
3. It may be noted that the requirement given in this RFP is indicative only.
4. Tenders/offers through email will not be accepted.
5. Bank reserves the authority to accept or cancel any or all tenders without assigning any reason.
6. All tenders in which any of the prescribed conditions are not fulfilled or are incomplete in any respect or there is any correction in Price Bid is not duly signed and dated by the bidder are liable to be rejected.
7. In the event that the L-1 vendor fails to meet the eligibility criteria or is unable to complete/execute the assigned work, the Bank reserves the right to award the tender to the L-2 or L-3 vendor, provided they agree to execute the work at the same rates quoted by the L-1 vendor.



Zonal Head
Kanpur Zonal Office

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official





यूको बैंक
सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



Eligibility Criteria

1. The contractor must be empaneled contractor of UCO Bank.
2. The contractor must apply only in that trade (furnishing, electrical & air conditioning works) in which he has been empaneled in the Bank.

Evaluation Criteria

Lowest Bid Value will be evaluated on lowest price offered by the bidder against Financial Bid.

Rejection of Bids


The bid is liable to be rejected summarily if:

- i) Tenders are not received in two parts in separate envelopes.
- ii) It is not in conformity with the instruction mentioned in this tender document.
- iii) If it is not accompanied by requisite tender cost and EMD as stated above.
- iv) It is received after expiry of the due date and /or time.
- v) It is evasive and contains incorrect information.
- vi) If there is canvassing of any kind.
- vii) It is submitted anywhere other than the tender box or to the addressee.
- viii) If any indication of price/rate/charges is being found in Part-I of the tender.
- ix) If the bidder has applied in that trade in which he/she is not empaneled.

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



Azadi Ka
Amrit Mahotsav

_____ day of _____ 2025

ANNEXURE - I

To
Zonal Head
UCO Bank Zonal Office
Kanpur

Sir

1. We have carefully examined all the contents incorporated in the various parts of this Tender Document no dated and taken note of all the terms & conditions stated in the Tender Document in its various parts.
2. We hereby agree to abide by and fulfil all other Terms and Conditions of the Tender.
3. We also agree to keep the retention money clause as mentioned in the tender document.
4. The integrity and letter of undertaking and indemnity submitted by us during empanelment in Bank's list of empaneled contractors shall be binding on me during the course of this work.

For and on behalf of

(With seal)
Signature _____
Name _____
Designation _____
DULY AUTHORIZED SIGNATORY


Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक
सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



_____ day of _____ 2025

ANNEXURE-II
TECHNICAL SPECIFICATIONS
Approved Make

APPROVED MAKE OF MATERIALS		
1.	False Ceiling/Channels	India Gypsum/Armstrong/AMF/Saint Gobain
2.	Aluminium Framework/Aluminium Section	Jindal/Tata
3.	WoodSkirting/Moulding/Lipping/Beading	C P Teak
4.	Wood Preservative	ST P Pentaphene Pale / Termiseal by PCI / Bison by British Paint
5.	Fire Retardant Paint	Industrial grades of Nobel/Viper
6.	Marine Ply with ISI:710 Mark	10 BWR Green/Century/Archid (Sub-brand is not accepted)
7.	BWP Block Board (IS:1659)	IS:710 BWR Green/Century/Archid (Sub-brand is not accepted)
8.	Laminate (1 mm thick)	Merino Lam / Green lam /Century mica / Sun mica
9.	Door Closure (Heavy Duty)	Ebco / Ozone / Dorma / Godrej
10.	Door Lock	Godrej/Ebco
11.	Door Handles	Godrej / Hafele /Hettich / Ebco
12.	Drawer/Storage Handle	Godrej / Hafele /Hettich / Ebco
13.	Drawer/Storage lock (Multipurpose)	Godrej / Hafele /Hettich / Ebco
14.	Night latch	Godrej
15.	Screws	GKF/Nettle Fold
16.	Hinges	CIEF
17.	Sliding telescopic drawer channel	Ebco / Kombo / Earl Behari / Efficient Gadjets
18.	Cable Organiser	Ebco/Innofitt Systems (CM 63C)
19.	Adhesive	Fevicol SH / Araldite
20.	Soft Board	Jolly Board
21.	Vertical/Roller Blinds	Mac / Vista / Wincab
22.	Glass	Modiguard /AIS / Saint Gobain

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:


Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



23.	Paints (Synthetic Enamel / Acrylic Emulsion)	Asian Paints / Berger / Dulux
24.	PVC Flooring	Krishna Vinyl / Armstrong / Birla
25.	Texture Paint	Asian Paints / Berger / Dulux
26.	G I Pipe	TATA (Medium)/Jindal Steel
27.	Cement	Ultratech/Ambuja/ACC
28.	Vitrified tiles	Johnson/Kajaria/Nitco/ASL
29.	Ceramic Tiles	Johnson/Kajaria/Nitco/ASL
30.	ACP	Alucobond/Alstone/Eurobond
31.	Veneer (4mm)	Century/Ply
32.	All materials not covered above	As per sample approved by Bank/Architect

RFP for Furnishing work at Bank's Trijunction Branch situated at 6/204, Tikonia, Belanganj, Agra, Uttar Pradesh – 284004.

Part – II (Financial Bid)

The information provided by the bidders in response to this RFP Document will become the property of the Bank and will not be returned. The Bank reserves the right to amend, rescind or reissue this RFP Document and all amendments will be advised to the bidders and such amendments will be binding on them. The Bank also reserves its right to accept or reject any or all the responses to this RFP Document without assigning any reason whatsoever.

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



This document is prepared by UCO Bank for Interior Furnishing work at Bank's Trijunction Branch situated at 6/204, Tikonia, Belanganj, Agra, Uttar Pradesh – 284004.


It should not be reused or copied or used either partially or fully in any form.

ESTIMATE FOR FURNISHING WORKS
UCO BANK AT BRANCH FIROZABAD BRANCH & ATM
ZONAL OFFICE KANPUR
1. No offsite prefabrication shall be allowed in any case. All fabrication shall be done at the site after getting the materials inspected by the architect
2. No payment shall be made for any in completed or unsatisfactory work
3. The Contractor should strictly follow the Booklet requirements of the Bank
4. including the detailed drawings in the booklet. Any discrepancy between the booklet and the Specifications below should be brought to the notice of the Architect.
5. List of material to be strictly as per the booklet.
6. Cable Managers to be provided in the tables and Counters wherever required.
7. All underframe should be properly treated with antitermite and waterproofing material
8. All Locks in the drawers and doorsetc. should be of Godrej
9. All keyboard Trays and Drawers to be on Channel Sliding Mechanism.
10. Etching to be provided as per Banks Design and Specification.
11. The contractor to follow the banks colour Coding. Any other specified colour to be superceded by the Banks Colour code.
12. All board to be BWP. Of approved brand and if written BWR it should be superceded by BWP board/ply.

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:

Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



ESTIMATE FOR FURNISHING WORKS

UCO BANK AT BRANCH TRI JUNCTION, ARYA NAGAR BRANCH & ATM

ZONAL OFFICE KANPUR

1.No offsite prefabrication shall be allowed in any case. All fabrication shall be done at the site after getting the materials inspected by the architect

2.No payment shall be made for any in completed or unsatisfactory work

3.The Contractor should strictly follow the Booklet requirements of the Bank

including the detailed drawings in the booklet. Any discrepancy between the booklet and the Specifications below should be brought to the notice of the Architect.

4.List of material to be strictly as per the booklet.

5.Cable Managers to be provided in the tables and Counters wherever required.

6.All underframe should be properly treated with ant termite and waterproofing material

7.All Locks in the drawers and doors etc. should be of Godrej

8.All keyboard Trays and Drawers to be on Channel Sliding Mechanism.

9.Etching to be provided as per Banks Design and Specification.

10. The contractor to follow the banks colour Coding. Any other specified colour to be superseded by the Banks Colour code.

11. All board to be BWP. Of approved brand and if written BWR it should be superseded by BWP board/ply.


Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक
सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust




S.No.	Item	Units	Qty.	Rate	Amount
	In case of full height partitions measurement of height shall be taken from the finished floor level upto the level of the false either side of the partition ceiling, in case of varying heights on average height shall be considered.				
	The rate to include provision of extra framework as necessary for skirting & making provision for laying conduit as/drng & directions of site engr./ architect. All under framing to be treated with antitermite solution chlorpyriphos based in recommended dilution.				
1	Full Height partly glazed/unglazed Partitions (Including Doors)	Sq. ft.	312.00		

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust




<p>Glazed Partition(upto false ceiling height only considered and above necessary ceiling supports to be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75" section, spacing of 2'0"x2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of banks colours for skirting & borders on both sides and approved colour laminate for base colour on both sides. Above 1'0"/2'6"/3'0" height partition, fixed with 8 mm bevelled glass with sticker works door and teak wood beading with melamine polish. Clear glass shall be finished with frosted film sticking over the glass of approved pattern and design. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc.Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc.Complete as per drawings and instructions of the Architect.</p>				
<p>The job shall also include for provision of laying conduits, switch boxes etc. The erection of partition shall include for expansion bolts cleats, clamps bolts, nuts, screws, rivets and other accessories, all complete up to the satisfaction of the Architect.</p>				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:


Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust




<p>The partition and doors shall have hinges floor springs/sliding arrangement/hydraulic door closer, mortise locks with handle set (Godrej, Dorma make all), etc. The rate shall include cost of all materials, labour, T&P, wastages, etc. required for proper completion of work, all complete to the satisfaction of the Architect.</p>				
<p>Full height Solid partition (height 8'-6" or ceiling height) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75" sections, spacing of 2'0"x2'0" on both sides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colour for skirting & borders and laminates for base on both sides with all necessary fixing accessories, arrangements and etc. Partition shall have necessary opening of approved size as per standards for fixing machine's and additional frame to be fixed for strengthening the partition. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.</p>				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



2	Low Height Partition	Sq. ft.	76.00		
	Half Height partition to be made with Anodized Aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75" sections, spacing of 2'0"x2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and white colour laminates for base on both sides with all necessary fixing accessories, arrangements and etc.Partition shall have 12mm thick etched glass and fixed with teak wood beading with melamine polish.Clear glass shall be finished with frosted film sticking over the glass of approved pattern and design.The height of the glass sould be from 3'-0" two 4'-6". Rate to include providing cutouts and provisions to run electrical conduits, switches, etc.Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
3	Full Ht.7'-0" but for Cash Cabin)	Sq.F t.	272.00		
	(Cash Cabins)				
	Solid till 4'-0" then Aluminium Decorative Grill height till 7'-0" then again solid				


Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:

Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक



UCO BANK



सम्मान आपके विश्वास का


Honours Your Trust

<p>Decorative Grill (12mm thk)-hexagonal opening as per instruction of Bank's Engineer/Architect.) All exposed edges of Plywood shall be fixed with 1/8" C.P. Teak Lipping.</p>				
<p>Providing and fixing of Cash Enclosures at height of 7'-5" with Anodized aluminium frame work, heavy sections (2mm thickness) of 1.75"x1.75" section, spacing of 2'0"x2'0" on bothsides and covered 9mm thick BWP plywood finished with 1mm thick laminate of blue, red colours for skirting & borders, white colour laminates for base colour. Partition shall have provision for opening and 19mm BWP plywood tray for challan receiving purpose. Cost include aluminium grill and fixed with teak wood beading and duco paint. Cost also include 3 Nos of Solid core flush Doors with sizes of 2'6"x7'0", fixed in the partition. Door shall have teak wood beading and lipping with duco paint. Door finished with 1mm thick laminate of white colour for base and red & blue for skirting of approved pattern. Door shall have 8mm glass fixed with teak wood beading and duco paint. Rate to include hardware's like brass hinges, godrej three nos of night latch, door closure, door stopper and handles. Cost also include cash transaction opening shall be provided with door arrangements made with BWP plywood frame work finished by laminate, duco paint and</p>				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



	locking system. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
4	Cash Cabin- Aluminium Grill Top with teak Decorative Grill Partition).	Sq.ft	84.00		
	Providing and fixing of Aluminum grill work in cash counter top with all nessecary fixing support of 'L' , 'H' and 'C' aluminium sections and etc. Cost include 'L' , 'H' and 'C' aluminium sections, hardwares, tools, wastages, lead, lift, labour charges, loading, unloading charges, cutting, transport and etc. Complete as per instructions of the Architect.				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on **Twitter**:UCOBankOfficial; **Facebook**:Official.UCOBank; **Instagram**:Official.ucobank;

LinkedIn:UCO BANK; **You Tube**:UCO Bank Official




5	Front Counter	Rft	29.00		
	A. Running counter as per the drawing				
	Providing & Fixing clerical counter made out of 19.0mm thick BWP ply frame work for top, verticals, shelves, apron, sides, drawer unit, shutters, side units, customer top, foot rest, 12.0mm thick BWP ply for drawer sides, sliding shutters, front apron & 6mm thick ply for side unit back, drawer bottom, along with necessary 2" X 2" or 2" X 1.5" teak wood beading. Laminate matching imported wood molding & teak wood supports for fixing of top. The clerical counter shall have 2'-6" in depth & counter shall have top i.e. one at 2'-6" height finish in approved make/ color 1.0mm thick laminate etc. complete. The clerical counter shall have 1No. of key board tray, 2 Nos. of equal drawers or as per the Bank requirements & one openable shutter. All exposed surfaces i.e. apron, counter side etc. finish with approved make/color 1.00mm thick laminate & moulding finish with 3 coats of melamine polish and internal surfaces shall have polish along with necessary approved Stainless Steel.	SSS			

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	Hinges, Ball Catches, Stainless Steel Locks, approved design Stainless Steel Handles, Stainless Steel Powder Coated Grommet (wire manager), Wood Foot Rest (Movable) Earl-Bihari make Twin Telescopic Channel, CPU Hanger/Trolley INNOFIT make etc. complete as per detail drawing and Instructions of the Bank's Engineer/ Architect.				
6	Cash Counter	Rft	10.00		
	A. Cash counters as per the drawing				
	Providing and fixing into position Cash counters as per detailed drawing made of Phenol bonded 19mm thick BWP commercial board finished with 1.0mm thick BWP laminate on top, front and sides as per detailed drawing. The front member of the cash counter to continue to 3'-8" height. At 3'-8" m height a projection of 15cm extended towards the customers side while a projection of 25.5 cm will be extended towards the staff. The outward projection to be made of 19 mm thick phenol bonded commercial board finished with 1mm thick laminate top. The counter to have one drawer unit of 3 drawers & space for CPU. 2 drawers to have division for cash as banks specifications. The exposed edges to have TW beading as in the design.				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	The item included all hardware such as channels of glydo/ hettich/ flyrail, self closing hinges/ locks/ handles/ laminated keyboard tray, Other hardware etc.The exposed surfaces to be finished with 1mm thick laminate of approved shade. Provision of footrest to be made as specified.All exposed wooden surfaces to be finished with clear melamine polish as approved by the Architect. All unexposed surfaces to have synthetic enamel paint with primer, all complete as per detailed drawings and direction of the Architect. The counter to have provision for cable manager and keeping mouse.				
7	12 mm Thick Etched Glass For Cash Cabin's and Front Counter (Glass To Be Toughened)	Sq. ft.	87.00		
	Supplying and fixing 12mm thick toughened glass in bank front counter's and cash counter front side of approved length and width and fixed with "D" bracket and all necessary fixing accessories, arrangements and etc Each glass shall have four nos of "D" bracket. Cost include edge machine polish in glass. Cost include making holes for transaction purpose for each glass, wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc.Complete as per drawings and instructions of the				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



	Architect. Measurements shall be made actual laid quantity in SFT.				
8	Wicket Gate Solid	No.	1.00		
	Supplying and fixing Wicket door of size (3'-0"x2'-6" Height x 1no) to be made with 19mm thick BWP plywood shutter and frame work with all necessary fixing accessories, arrangements and etc. Door both sides shall be finished with 1mm thick laminate of blue, red colours for skirting & border and white colour laminate for base colour on both sides. Plywood edges to be finished with edge band of approved colour. Teak wood frame shall be used in hinges side with duco paint of approved colour. Cost include nesscessary hardwares like screws, tower bolt and etc. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.				
	(Incl Door Closer/Stopper/mortice lock)				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




9	Main Entrance Door Toughened	Sq.Ft	32.00		
	Providing and fixing of door with side panel with 12 mm toughened glass complete with Ozone Patch fittings including Top Patch (OPF-02)Bottom Patch(OPF-3)Angle Lock(OPL-1)Top Pivot (OFS-ACC-GDP)Floor Spring (FS8400)and handle(OGH)32x457				
10	Fixed Toughened Glazing with Etching	Sq.Ft	81.00		
	Providing and fixing of 12 mm toughened glass complete with Ozone Patch fittings including Top Patch & Bottom Patch				
11	Mineral Fiber ceiling with UNI T 15mm T Grid & 16mm MPRESSIONS™ ClimaPlus™ Ceiling tiles (600x600mm)	Sq.Ft.	472.00		

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



This includes USG Knauf UNI T 15mm grid Wall angle of 19mmx 19mm x 0.40mm shall be screw fixed to brick wall/partition with the help of approved screws at 600mm centres. Then suspending USG Knauf UNIT 15mm Main T grid of 15mm x 38mmx0.30mm of length 3600mm is hung with USG Knauf adjustable level clips 80x30x0.70mm & 4mm diameter GI rod which are connected to USG Boral Soffit Cleat 37mmx27mmx1.6mm and 8mm dia 40mm long Anchor Fasteners @1200mm centres or as approved from RCC Slab. The USG Boral UNIT 15 Cross T of 15mm x 38mmx0.30mm of 1200mm length shall be interlocked between main T Grid at 600mm centres to form 1200 x 600mm modules. 600 x 600mm modules to be formed by click fitting USG Knauf UNIT 15 Cross T of 15mm x 38mm of 600mm length centrally between the 1200mm cross T's Then 16mm thick IMPRESSIONS™ ClimaPlus™ ceiling panel having FLB edge of size 595x595 shall be placed into the above grid of size 600x 600 mm. This ceiling panel conforms to ASTM E84 surface burning characteristics. (Class A, Flame Spread: 25 & Smoke developed: 50). The Ceiling panel provides NRC 0.60, CAC minimum: 33. Light Reflectance: 0.84, recycled content -45% Thermal Resistance: R- 0.3 & can withstand Relative Humidity up to RH

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust




	99% (limiting conditions –Max 49 degree C/99%RH). The front & back side of the tile has anti- Microbial ZOE coating				
12	False Ceiling Works (Gypsum)	Sq.F t.	680.00		

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:

Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	Supplying and Erecting Saint Gobain Gyproc Gypboard false ceiling at different heights with saint gobain framework of G.I. Section (of medium thickness) of spacing 4'0"x2'0" above with 12.5 mm gypboard shall be fixed with all necessary fixing accessories, arrangements and etc. Rate shall include cut-outs for lights, ac and etc. The ceiling shall be putty finished and sanded to form clean and homogeneous surface. Cost include hidden lighting arrangements and etc. Rate to include painting two coats of acrylic emulsion of approved colour after necessary preparation, one coat of primer, full putty and etc. Cost include all necessary hardwares like nails, screws, wastages, transports, loading, unloading charges, labours, lead, lift, materials, tools and etc. Complete as per drawings and instructions of the Architect.				
13	Storage (Low Height / Full height Storage/ Overhead)	Sq.Ft	238.00		
	Size-2'-6" highX 1'-6"deep				
	Ply Wood -19.0mm thick board for side top and door & back 6.0mm IS 303 with shutters, shelf 19.0mm ply				
	Shelf -19.0mm thick BWP				
	Handle -Brush finish stainless steel				
	Lock -Vijayan/Godrej				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:

Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	Internal surface zinc oxide polish and other required accessories instructed by Bank's Engineer/Architect.				
14	Manager Table with Side Table and 12mm thick glass top	No.	1.00		
	Same as above complete work including 12 mm thick glass on top.				
	Size-6'-0" X 3'-0" X 2'-6"				
	(6'0" length, 3'0" width & 2'6" height) - Providing Table in position, Top shall be made of 19mm thick BWP comm. Board finished with 1.00mm thick laminate 1 3/4" x 1" teak wood beading as per design on all sides. The sides shall be made of 19mm thick BWP comm. board finished with 1.00mm th laminate as per design. with teak wood lipping on all exposed ends of sides The front apron shall be made of 19mm thick BWP comm. board finished with 1.00mm thick laminate as per design The drawers to be made out of 19mm thick comm. BWP board duly laminated in the front, sides to be made out of 12mm BWP comm. plyw and bottom to be made out of 6mm BWP comm. ply and it should play in drawer sliding channels. The inside of the drawer and the table to be duly paint.laminated. A legrest to be provided duly paint made out of 3"x2" thk wooden section. A shutter to be made by 19mm				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	<p>BWP comm. board cladded with 1.0 mm laminate. The necessary locks handles to be provided in each drawers and shutters. On top of the Branch managers table 12mm thk glass to be placed duly edge polished. The table should have key board tray and tea tray duly finished with 1.0 mm laminate. The necessary wire managers to be provided on the tables and provision for lights to be kept if required in the front of the table. (One coat of Ant termite treatment oil)</p>				
	Side Table-3'-0" X 2'-6" X 1'-6"				
	Ply Wood-19.0mm thick BWR Grade for frame work				
	Supports-2" X 2" & 2" X 1.5" CP Teak Wood and beading Patti				
	Drawer-1'-6" wide two drawers and one shutter below the drawers at left side of the table and two drawers at side table and below two shutters				
	Laminate-1.0mm thick approved colour				
	Key Board Tray-Metal INNOFIT make				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	CPU Metal Stand, Twin Telescopic Drawer Fittings, Brass Powder Coated Wire Manager				
	Handle-Brush finish stainless steel, Brass Ball Catches 12.0 thick plain glass with edge polish at top of the table (Other Exposed Edge of Ply with half round beading with approved colour polish)				
15	Writing Table & Brochure Holder, Cheque Drop Box, Suggestion Box with Notice Board. (The work shall be executed as per design and Elevation.	No.	1.00		
	Providing and fixing in position a writing counter with open storage made of 12mm and 19mm thick BWP ply/ commercial board finished with 1.0mm laminate and teak wood moulding/ lipping with a 6mm glass top with polished edges as per drawing and design. The glass to be of size to fit internally and the 19mm border and 6mm lipping to be flushed with the glass. The storage unit shall consist of vertical space dividers of 12 mm board with 1.0 mm laminate till the glass top for the provision of holding withdrawl/ deposit slips stationery etc. The counters to be held in position around the columns by dash fastners at a height of 3.5/ 4 ft. Notice board with cellotex base & cloth bound in corporate coloured binded with				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	teak wood lipping of 35 by 12 mm.size 1500X1200.All wooden surfaces to be finished in clear melamine polish and all unexposed sides to be finished in enamel paint of approved colour to be approved by the designer all complete as per detailed drawing, specification and direction of the Engineer in Charge.				
16	Wall Panelling & Column Pannelling	Sq.F t.	419.00		
	Column Panelling -upto false ceiling height only considered and above necessary ceiling supports shall be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5", spacing of 2'0"x 2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and base colour laminates for base colour.Rate to include providing cutouts and provisions to run electrical conduits, switches, etc.Cost include necessary hardwares like clamps, screws and et Cost include				


Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:

Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक



UCO BANK



सम्मान आपके विश्वास का


Honours Your Trust

	<p>provisions for electrical db closing 19mm thick BWP plywood door arrangements, wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per drawings and instructions of the Architect.</p>				
	<p>Wall Panelling-upto false ceiling height only considered and above necessary ceiling supports shall be provided) with Anodized Aluminium frame work, heavy sections (2mm thickness) of 2"x1.5", spacing of 2'0"x2'0" on bothsides and covered with 9mm thick BWP plywood finished with 1mm thick laminate of approved colours for skirting & borders and white colour laminates for base colour. Rate to include providing cutouts and provisions to run electrical conduits, switches, etc. Cost include necessary hardwares like clamps, screws and etc. Cost include provisions for electrical db closing 19mm BWP plywood door arrangements, wastages, transports, loading, unloading charges, labours, materials, tools, ead, lift and etc. Complete as per drawings and instructions of the Architect.</p>				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




17	Shutter Boxing with A.C.P. (Boxing with Trap door)	Sqft	74.00		
	ACP Panneling & Rolling Shutter Box.				
	Frame Work-2" X 2" X 1.5 mm thick Aluminium Tubular section (Horizontal/Vertical) Jindal Make				
	Aluminium Composite Panel-3.0mm thick of approved colour with bonding material.				
18	Meter Boxing (Only front face to be measured for payment purpose)	Sq.F t.	38.00		
	Manufacturing, supplying and fixing box type metre storage with overall depth of 1'6" and height as per the size of the mitre. comprising of the following.				
	19mm BWP block board hinged double shutter, height as size of the panel with alround beadings 3/4" x 1/2", powder coated handles, piano hinges, magnetic ball catches, lock, locking arrangement, tower bolts etc., all as per directions.				
	All visible surfaces to be fixed with 1.0mm thick lamination sheet with matching grains & grooves as per instructions				
	All internal & rear surfaces to be painted with two coats of enamel paint over a coat of primer/putty as directed to get a smooth finish and 4nos-6" wide Powder Coated 2 nos Aluminium Aircon Louvers.				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




19	Acrylic Emulsion with POP Base.	Sq.F t.	3000.0 0		
	Providing & Applying painting of inner walls of Asian "Ace" / ICI make applied over the existing wall surface with 2coats of emulsion paint, surface preparation, 1coat of primer and putty complete. Properly scrapping and sand papering the existing wall painting surface and putty with neat line and level. Unit-SFT. Cost include wastages, transports, loading, unloading charges, labours, materials, tools, lead, lift and etc. Complete as per instructions of the Architect.				
	The rate shall include cost of all materials such as plaster of paris, whiting /primer, glue (Fevicol), indigo/stainer, brushes, sand paper, patti, dhoti, broom stick, clean water with storage and othercontainers, labour, scaffolding / ladder charges, cleaning of floors and other sundries etc., all complete to the satisfaction of the Architect.				
	TOTAL A				
ATM					
S.N o.	Item	Units	Qty.	Rate	Amount

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




1	Mineral Fiber ceiling with UNI T 15mm T Grid & 16mm MPRESSIONS™ ClimaPlus™ Ceiling tiles (600x600mm)	Sq.F t.	24.00		
	<p>This includes USG Knauf UNI T 15mm grid Wall angle of 19mmx 19mm x 0.40mm shall be screw fixed to brick wall/partition with the help of approved screws at 600mm centres. Then suspending USG Knauf UNIT 15mm Main T grid of 15mm x 38mmx0.30mm of length 3600mm is hung with USG Knauf adjustable level clips 80x30x0.70mm & 4mm diameter GI rod which are connected to USG Boral Soffit Cleat 37mmx27mmx1.6mm and 8mm dia 40mm long Anchor Fasteners @1200mm centres or as approved from RCC Slab. The USG Boral UNIT 15 Cross T of 15mm x 38mmx0.30mm of 1200mm length shall be interlocked between main T Grid at 600mm centres to form 1200 x 600mm modules. 600 x 600mm modules to be formed by click fitting USG Knauf UNIT 15 Cross T of 15mm x 38mm of 600mm length centrally between the 1200mm cross T's Then 16mm thick IMPRESSIONS™ ClimaPlus™ ceiling panel having FLB edge of size 595x595 shall be placed into the above grid of size 600x 600 mm.This ceiling panel confirms to ASTM E84 surface burning characteristics. (Class A, Flame Spread: 25 & Smoke developed: 50). The Ceiling panel</p>				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:


Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



	provides NRC 0.60, CAC minimum: 33. Light Reflectance: 0.84, recycled content -45% Thermal Resistance: R- 0.3 & can withstand Relative Humidity up to RH 99% (limiting conditions –Max 49 degree C/99%RH). The front & back side of the tile has anti- Microbial ZOE coating				
2	False Ceiling Works (Gypsum)	Sq.F t.	55.00		

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.inContact:

Follow UCO Bank onTwitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	Supplying and Erecting Saint Gobain Gyproc Gypboard false ceiling at different heights with saint gobain framework of G.I. Section (of medium thickness) of spacing 4'0"x2'0" above with 12.5 mm gypboard shall be fixed with all necessary fixing accessories, arrangements and etc. Rate shall include cut-outs for lights, ac and etc. The ceiling shall be putty finished and sanded to form clean and homogeneous surface. Cost include hidden lighting arrangements and etc. Rate to include painting two coats of acrylic emulsion of approved colour after necessary preparation, one coat of primer, full putty and etc. Cost include all necessary hardwares like nails, screws, wastages, transports, loading, unloading charges, labours, lead, lift, materials, tools and etc. Complete as per drawings and instructions of the Architect.				
3	Main Entrance Toughened door	Sqft	27.00		
	Provoviding and fixing of door with side panel with 12 mm toughened glass complete with Ozone Patch fittings including Top Patch (OPF-02) Bottom Patch (OPF-3) Angle Lock (OPL-1) Top Pivot (OFS-ACC-GDP) Floor Spring (FS8400) and handle (OGH)32x457				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




3	Fixed Toughened Glazing with Etching	Sqft	30.00		
	Providing and fixing of 12 mm toughened glass complete with Ozone Patch fittings including Top Patch & Bottom Patch				
4	Storage Cabinet with Aluminium Louvers	No	1.00		
	Wooden storage cabinet for housing the UPS with batteries and VSAT-NIU 19mm IS 303 Block Board, with of cabinet 3' width x 3'-0" depth x 6' height with 2 shelves at 3' height (Dimensions Subject to size of the equipment). All specifications of board ply mica etc. including frame work to be as 13 above complete in all respect to the satisfaction of the Bank.				
5	Shutter Boxing with A.C.P. (Boxing with Trap door) and ATM Wall Panelling	Sqft	338.00		
	ACP Panneling & Rolling Shutter Box.				
	Frame Work-2" X 2" X 1.5 mm thick Aluminium Tubular section (Horizontal/Vertical) Jindal Make				
	Aluminium Composite Panel-3.0mm thick of approved colour with bonding material.				

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



	A.T.M. TOTAL AMOUNT (B)				
	GRAND TOTAL (A+B)				

Note: All rates are excluding G.S.T.


Measurement sheet for UCO Bank, at Branch Trai Junction

S. NO	ITEM	UNIT	L	B	H	No	QTY	WASTAGE 10%	FINAL TOTAL
1	FULL HT. PARTLY GLAZED/UNGLAZED PARTITION	Sq.ft.							
	MANAGER CABIN PARTITION INCLUDING DOOR		20.42		8.50		173.57		
	AC BLOCK PARTITION		0.00		10.50		0.00		
	UPS PARTITION		10.33		10.50		108.47		
	TOTAL						282.04	28.20	310.24
2	LOW HT. PARTITION	Sq.ft.							
	WICKET DOOR SIDE PARTITIONS IN RUNNING COUNTER		3.00		4.50	5.00	67.50		

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	TOTAL						67.50	6.75	74.25
3	CASH CABIN PARTITION	Sq.ft.							
	SIDES PARTITION FOR CASH-		7.00	7.50	3.00		157.50		
	BACK SIDE PARTITION FOR CASH		10.42	7.50			78.15		
	FRONT SIDE PARTITION FOR CASH		5.00		2.00		10.00		
	TOTAL						245.65	24.57	270.22
4	Cash Cabin- Aluminium Grill Top with teak Decorative Grill Partition).	Sq.ft.			75		75.00	7.50	82.50
5	FRONT COUNTER	RFT	25.50				25.50	2.55	28.05
6	CASH COUNTER	RFT	10.00				10.00	1.00	11.00
7	12 MM GLASS FOR CASH COUNTER & FRONT COUNTER	SQ. FT.							
	FOR CASH		10.00	3.50			35.00		
	FOR FRONT		21.58	2.00			43.16		

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	TOTAL						78.16	7.82	85.98
8	WICKET GATE SOLID	NO.				1.0 0	1.00		1.00
9	MAIN ENTRANCE DOOR TOUGHENED	Sq.ft							
	BRANCH		4.00	7.00			28.00		
	TOTAL						28.00	2.80	30.80
10	FIXED TOUGHENED GLAZING WITH ETCHING	Sq.ft							
	BRANCH		11.8 2	8.50			100.4 7		
			4.00	7.00			-28.00		
	TOTAL						72.47	7.25	79.72
11	FALSE CEILING ARMSTRONG	SQ. FT.							
			44				112.00		
			56				196.00		
			36				72.00		
			36				56.00		
			24				36.00		

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	TOTAL	196.0 0				472.00		472.00
12	FALSE CEILING GYPSUM	SQ. FT.						
	TOTAL AREA OF FALSE CEILING					926.00		
	LESS ARMSTRONG					- 472.00		
	ADD VERTICAL PATTA		196.0 0	0.75		147		
	TOTAL					601.00	60.10	661.10
13	LOW HT. STORAGE							
	LOW HT. STORAGE IN MANAGER	SQ. FT.	10.00	2.50		25.00		
			22.50	8.50		191.25		
	TOTAL					216.25	21.63	237.88
14	MANAGER TABLE WITH SIDE CREDENZA	NO.				1.0 0	1.00	1.00
15	WRITING TABLE WITH BROCHURE HOLDER, CHEQUE DROP BOX, SUGGESTION BOX & NOTICE BOARD	NO.				1.0 0	1.00	1.00

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




16	COLUMN PANELING & WALL PANELING	SQ. FT.						
	WALL PANELING IN MANAGER CABIN		18.08	8.50		153.68		
	COLUMN IN PANELLING		3.25	8.50	2.0 0	55.25		
	WALL PANELING		27.75	4.50		124.88		
			10.00	4.50		45.00		
	TOTAL					378.81	37.88	416.69
17	SHUTTER BOXING & METER BOXING	SQ. FT.						
	SHUTTER BOXING IN BRANCH FRONT FACE		7.75	3.00		23.25		
			3.00	2.00	2.0 0	12.00		
			7.75	2.00	2.0 0	31.00		
	TOTAL					66.25	6.63	72.88
20	METER BOXING		4.00	8.50		34.00	3.40	37.40
21	Acrylic Emulsion with POP	SQ. FT.						

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




	Base.(WALL & CEILING)							
	A.C. WALLS		82.00	8.50		697.00		
	STRONG ROOM WALL		72.42	10.50		760.41		
	ROOF					182.00		
	TOILET		55.75	10.50		585.38		
						74.00		
	RECORD ROOM		34.42	10.50		361.41		
	ROOF					54.00		
	TOTAL					2714.20	271.42	2985.61
ATM								
21	FALSE CEILING ARMSTRONG	SQ. FT.						
		20				24.00		
	TOTAL	20				24.00		24.00
12	FALSE CEILING GYPSUM	SQ. FT.						
	TOTAL AREA OF FALSE CEILING					58		
	LESS ARMSTRONG					-24.00		
	ADD VERTICAL PATTI		20	0.75		15.00		
	TOTAL					49	4.90	53.90

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBANKOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




23	ENTRANCE DOOR	SQ. FT.						
			3.50	7.00		24.50		
	TOTAL					24.50	2.45	26.95
24	FIXED TOUGHENED GLAZING WITH ETCHING	SQ. FT.						
	ALUMINIUM ENTRANCE DOOR		4.33	8.50		25.50		
	TOTAL					25.50	2.55	28.05
25	SHUTTER BOXING & METER BOXING	SQ. FT.						
	SHUTTER BOXING IN BRANCH FRONT FACE		8.75	3.00		31.74		
	SIDE BOXING		3.00	2.00	2.0 0	12.00		
			8.75	2.00	2.0 0	42.32		
	A.T.M. WALL		28.91	8.50		219.47		
	TOTAL					305.53	30.55	336.08

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official



यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust



Sl. No.	Materials	Approved manufacturers / suppliers
1	Paint	I.C.I. (Dulex - Duco) / Asian paints / Goodlac Nerolac
2	Plywood	BWR- Century/Green/Archid only Premium quality
3	Wood preservative	BWR- Century/Green/Archid only Premium quality
4	False ceiling	Armstrong , Indian gypsum board
5	Laminates	Sunmica/ Archid/Century/Green 1mm thick as per bank approved color
6	Screws	G.K.W./Nettle fold
7	Adhesive	Fevicol SH
8	Night latch	Godrej
9	Locks	Godrej
10	Aluminium door frame	Jindal
11	Glass	Modi/Asahi/Saint Gobain
12	Aluminium cladding	Eurobond/Altobond/Alukbond
13	Key board drawer	EBCO
14	Telescopic CPU stand	EBCO
15	Cable organiser(wire manager)	EBCO
16	Vitrified tiles	JhonsionsPerlto
17	Venetion blind	Vista, Luxaflex

Note : Plywood mentioned in the drawings as well as in bill of quantities should be IS: 710 BWR-Century/Green only Premium quality.

(Signature of bidder with seal) _____

Name _____


Designation _____

Note: The Bank reserves the right, neither to execute all items of work nor to execute the full quantity of items, as mentioned in schedule of quantities.

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




यूको बैंक


सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust

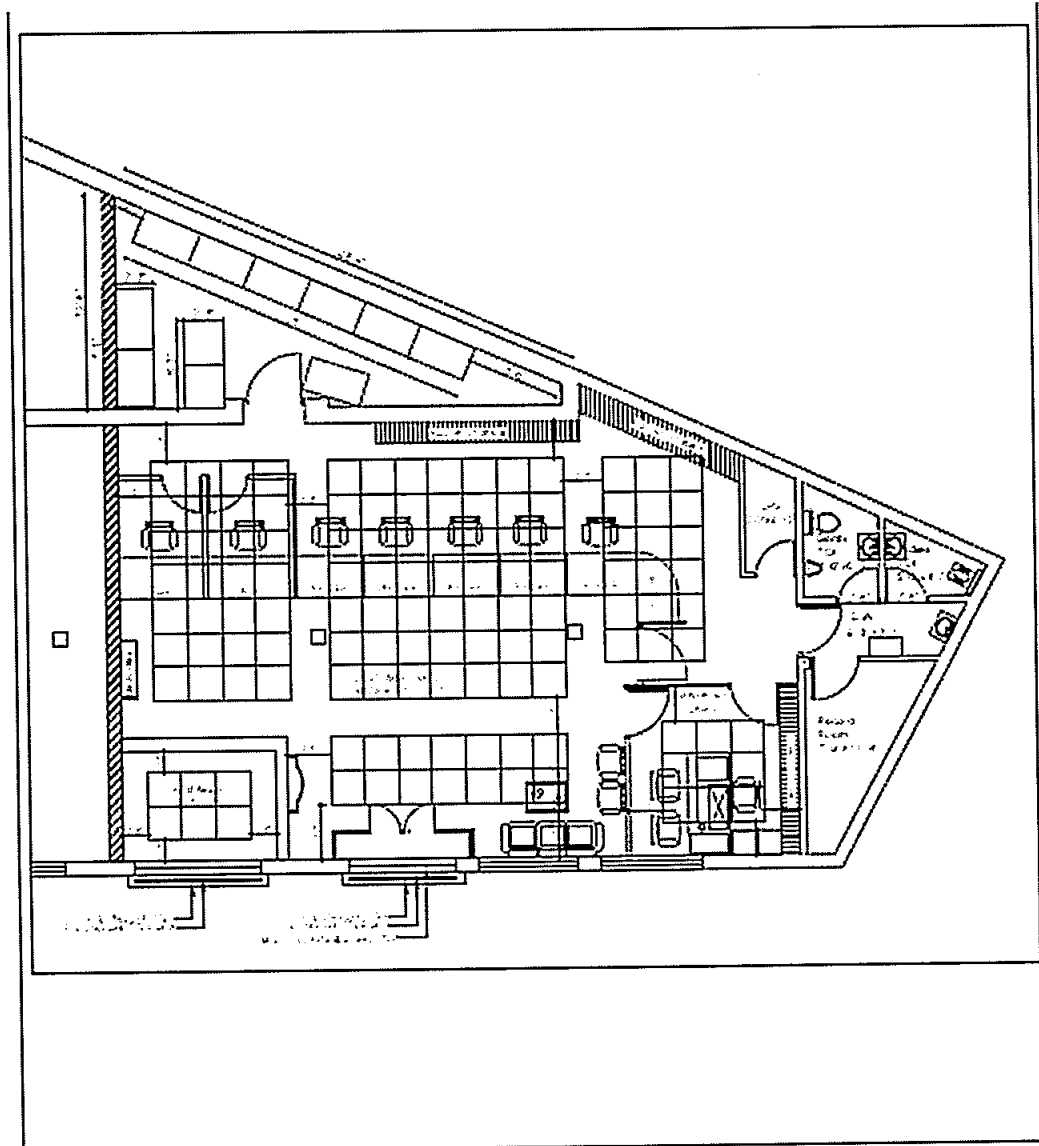


<p>PROJECT - FALSE CEILING PLAN FOR UCO BANK BRANCH AT THE JUNCTION, ARYA NAGAR KANPUR, UP.</p>	<p>ORG TITLE - GROUND FLOOR PLAN</p> <p>DATE - MAR-2016</p>	<p>NORTH -</p>  <p>DRAWN BY -</p>	<p>ARCHITECT - GUNJAN & ASSOCIATES ARCHITECTS, ENGINEERS, INTERIOR AND LANDSCAPE DESIGNERS 141, SAHNI NAGAR, LANE NO-9, RAEBARELI ROAD LUCKNOW-226002 Telephone No. - +9122-3533324 Phone No. - +9138816489, 9839018489 E-Mail - studio@gunjanandassociates.com Web - www.gunjanandassociates.com</p>
---	---	--	---

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust

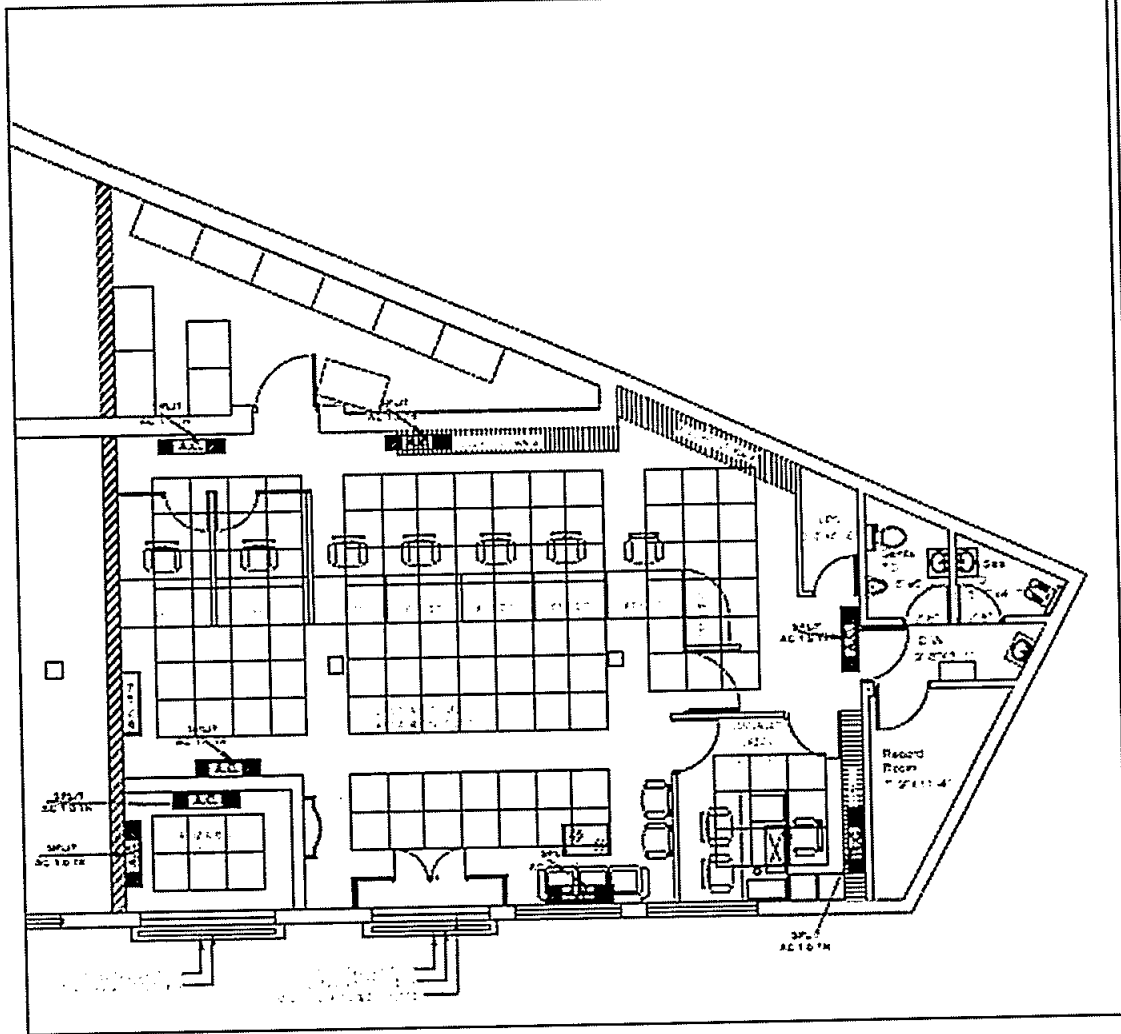

LEGENDS		
NO	SYMBOL	DESCRIPTION
1		SPUT AC 10 TR
2		SPUT AC 11 TR
3		SPUT AC 12 TR

PROJECT - AC PLAN FOR UCO BANK BRANCH AT TRI JUNCTION, ARYA NAGAR KANPUR, UP.	DWG TITLE - GROUND FLOOR PLAN	NORTH - 	ARCHITECT - GUNJAN & ASSOCIATES ARCHITECTS, ENGINEERS, INTERIOR AND LANDSCAPE DESIGNERS, 141, SARKER NAGAR LANE NO-9, RAJBARELI ROAD LUCKNOW-226002 Telephone No:- +9122-3553324 Phone No:- +9135518489, 9839016489 E-Mail:-gunjan@gunjanandassociates.com Web:-www.gunjanandassociates.com
	DATE - MAR-2016	DRAWN BY -	

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:


Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official




यूको बैंक

सम्मान आपके विश्वास का



UCO BANK

Honours Your Trust

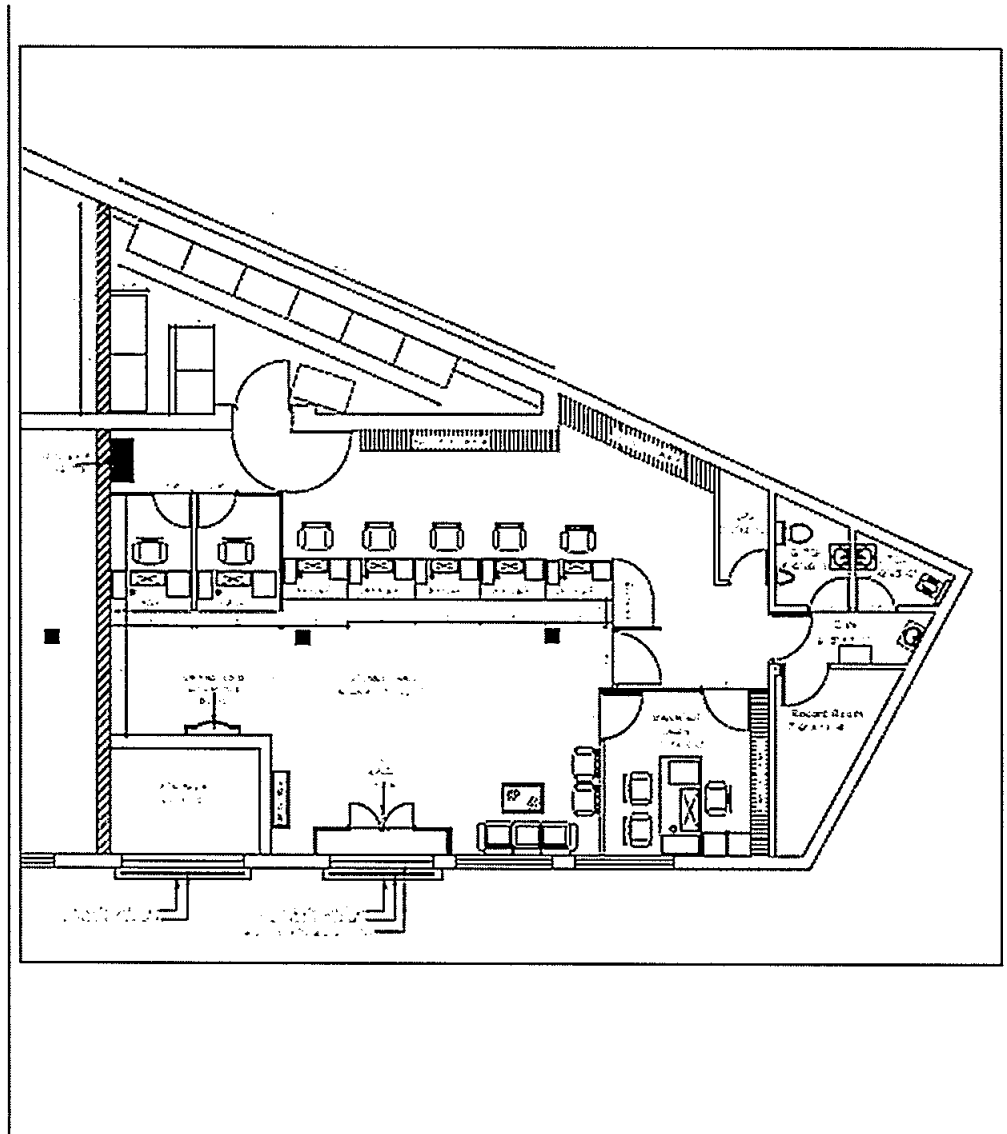

PROJECT - LAYOUT PLAN FOR UCO BANK BRANCH AT TRI JUNCTION, ARYA NAGAR KANPUR, UP.	DRG TITLE - GROUND FLOOR PLAN	NORTH - 	ARCHITECT - GUNJAN & ASSOCIATES ARCHITECTS, ENGINEERS, INTERIOR AND LANDSCAPE DESIGNERS 141, SAHNI NAGAR, LANE NO-9 RAEBARELI ROAD LUCKNOW-226002 Telephone No. - +9122-3533324 Phone No. - +9138818489, 9839012489 E-Mail -studio@gunjanindassociates.com Web -www.gunjanindassociates.com
	DATE - MAR-2025	DRAWN BY -	

Branch/ Office- ZONAL OFFICE, Email: zo.kanpur@ucobank.co.in Contact:

Follow UCO Bank on Twitter:UCOBankOfficial; Facebook:Official.UCOBank; Instagram:Official.ucobank;

LinkedIn:UCO BANK; You Tube:UCO Bank Official