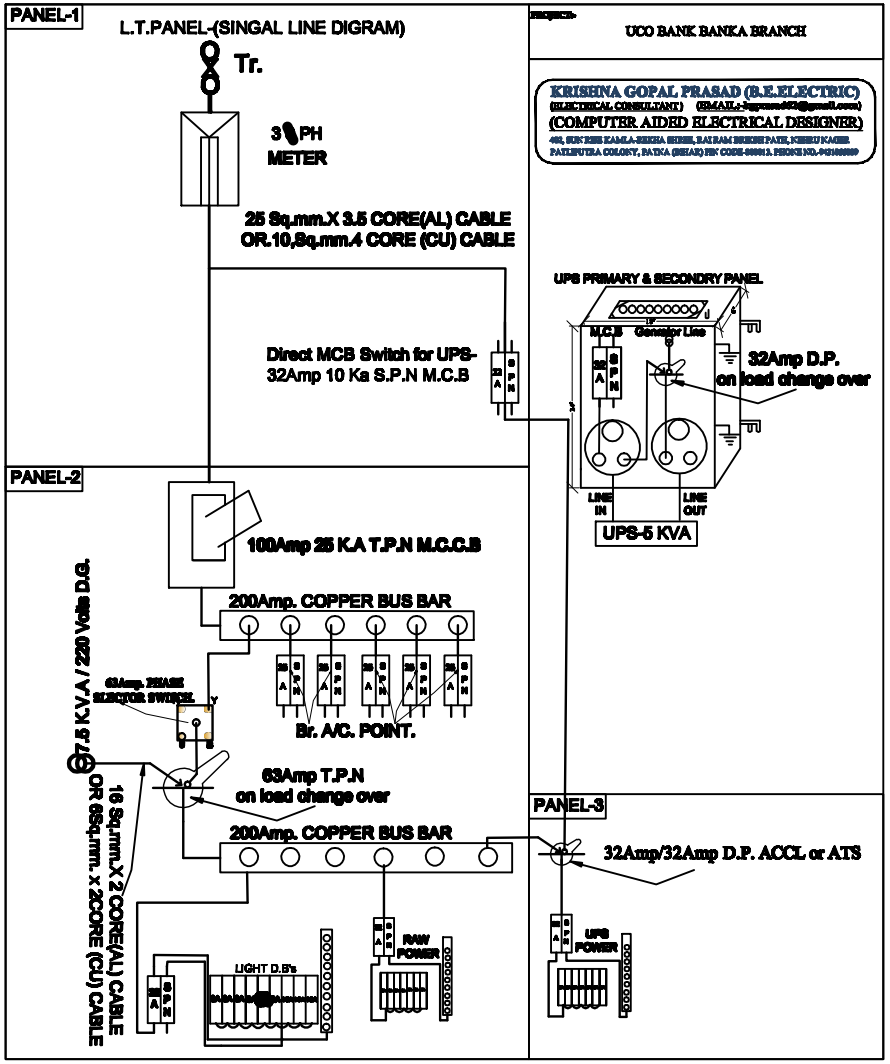

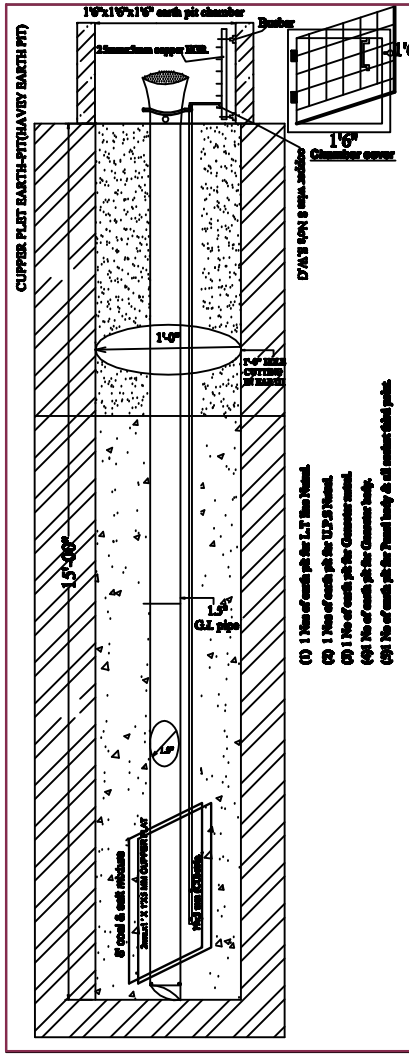

CUPPER PLET EARTH-PIT (HAVEY EARTH PIT)

1.-G.I. pipe 15 feet with 8feet net cutting.-1 no.
2.-G.I. Redution sicket 2.5"/1.5"-1 no.
3.-G.I. Plug 2.5" dia-1 no.
4.-12"x12" chember cover-1 no.
5.-Copper Plate 24"x12"x3mm-2 no.
6.-Copper strip 20mmx3mm-18feet.
7.-Salt 10 K.G.
8.-Wooden coal- 60 K.G.

1.-The rate shall be inclusive of submission of Test Report- (2 Ohm) of each earth pit and Testing shall be carried out in front of Officials / Consultant.

2.--Earth pit material should be veryfied by Branch Manager before installation as per specification in B.O.Q..

PROJECT:- UCO BANK BANKA BRANCH

KRISHNA GOPAL PRASAD (B.E.ELECTRIC)
(ELECTRICAL CONSULTANT) (EMAIL:-kgprasad62@gmail.com)
(COMPUTER AIDED ELECTRICAL DESIGNER)
402, SUN RISE KAMLA-REKHA SHREE, RAI RAM BRIKSH PATH, NEHRU NAGER
PATLIPUTRA COLONY, PATNA (BIHAR) PIN CODE-800013. PHONE NO.-9431066989